

SACE Emax 2

Contatti di segnalazione in inserito/test/estratto AUP - E2.2 -E4.2 -E6.2


Connected/isolated for test/disconnected signalling contacts AUP - E2.2 -E4.2 -E6.2





Meldekontakte in Betriebsstellung/Trennstellung für Prüfung/Außenstellung AUP - E2.2 -E4.2 -E6.2


Contacts de signalisation embroché/essai/débroché AUP - E2.2 -E4.2 -E6.2

Contactos de señalización en posición insertado/prueba/extraído AUP - E2.2 -E4.2 -E6.2


E2.2 -E4.2 -E6.2

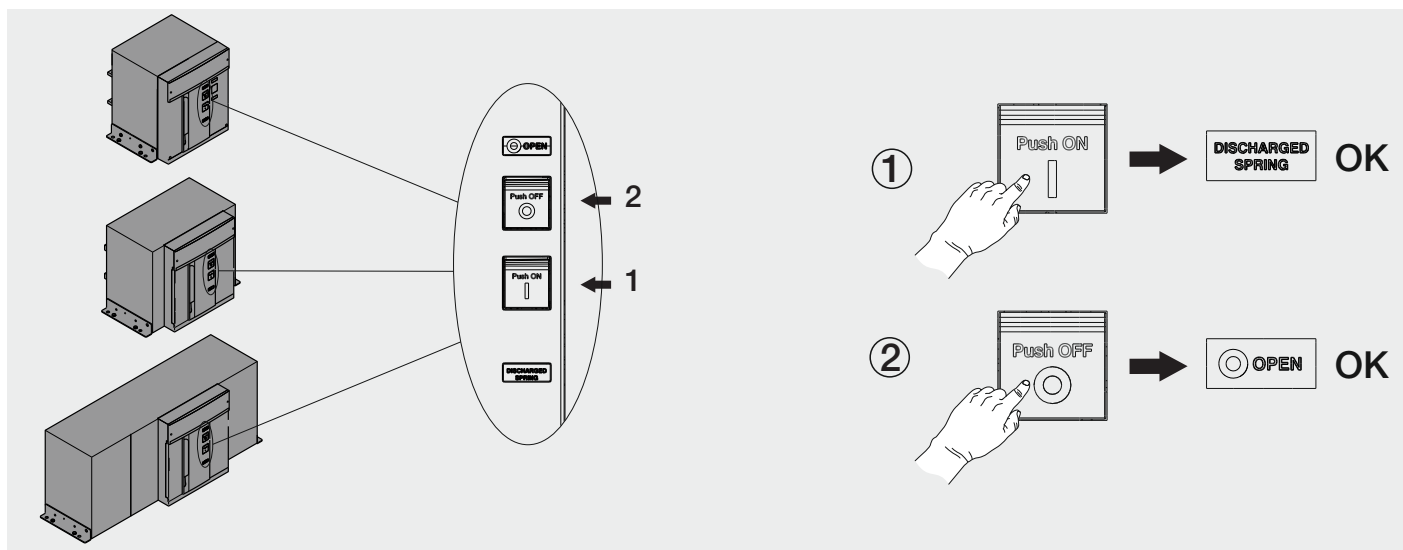


	 							
400Vac Sx 2I/1T/2E	1	-	2	2	2	2	2	
400Vac Dx 2I/1T/2E	-	1	2	2	2	2	2	
24Vac Sx 2I/1T/2E	1	-	2	2	2	2	2	
24Vac Dx 2I/1T/2E	-	1	2	2	2	2	2	
400Vac Dx 1I/3T/1E	-	1	2	2	2	2	2	
24Vac Sx 4I/1E	1	-	2	2	2	2	2	
400Vac Sx 4I/1E	1	-	2	2	2	2	2	




E2.2

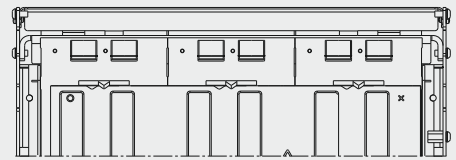



E4.2-E6.2

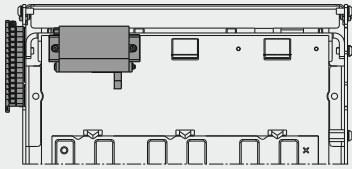


E2.2

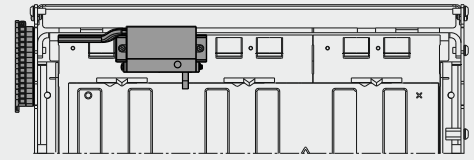


E4.2-E6.2

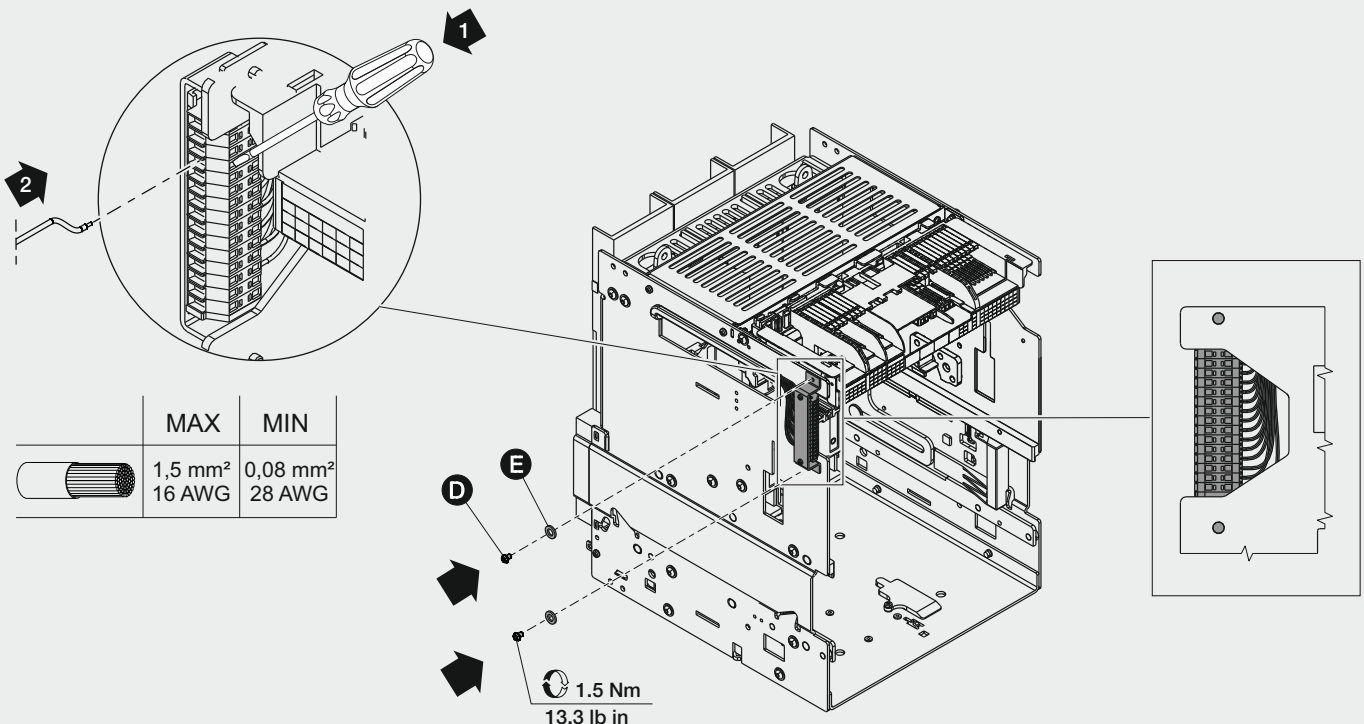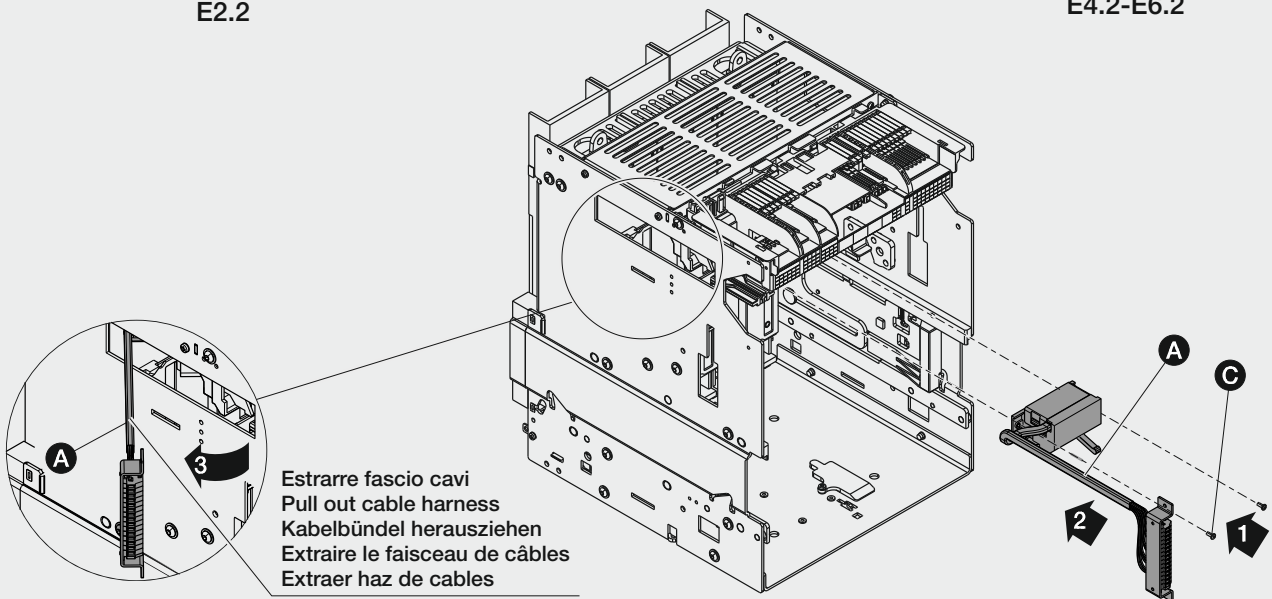


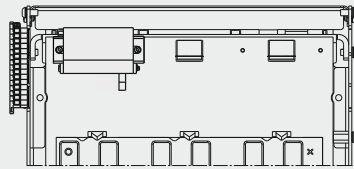


E2.2

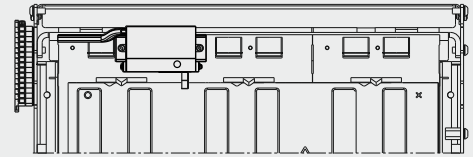



E4.2-E6.2

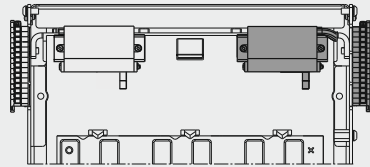


E2.2

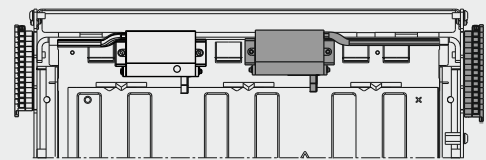



E4.2-E6.2

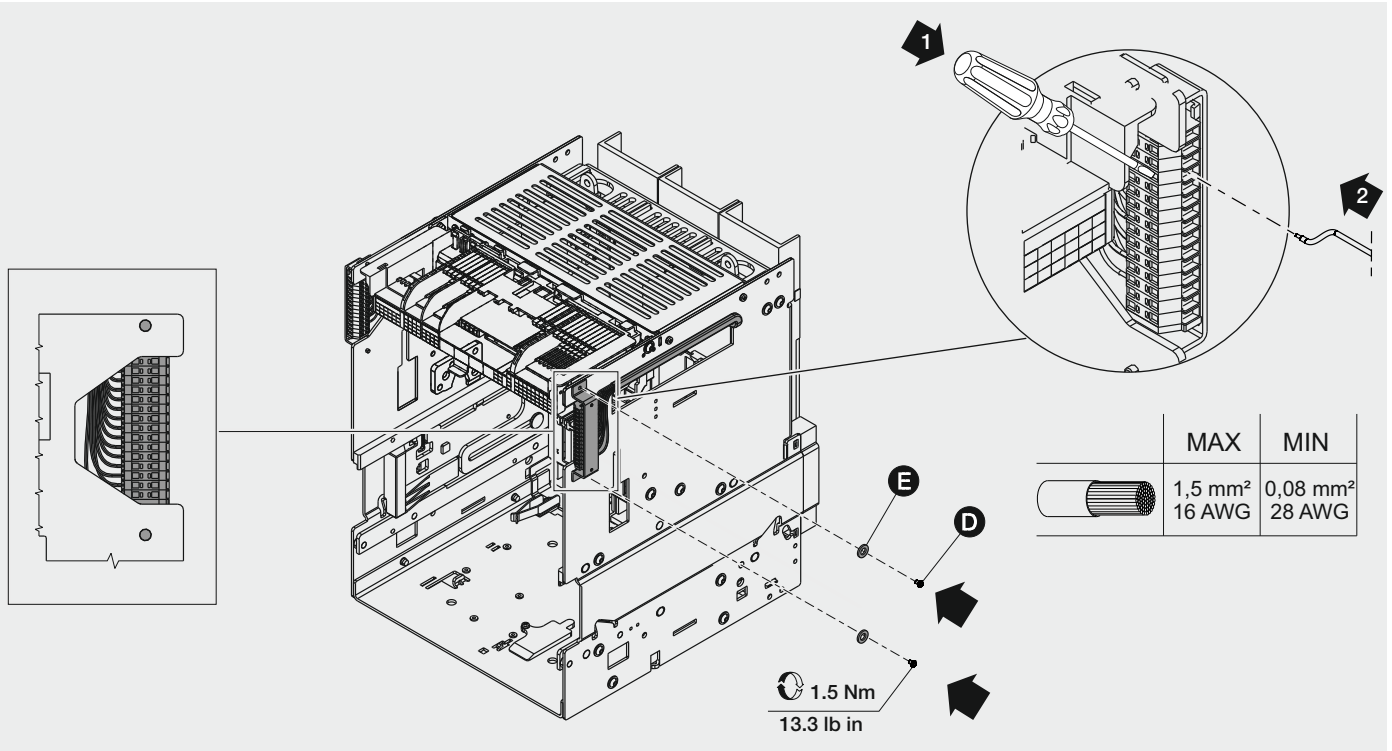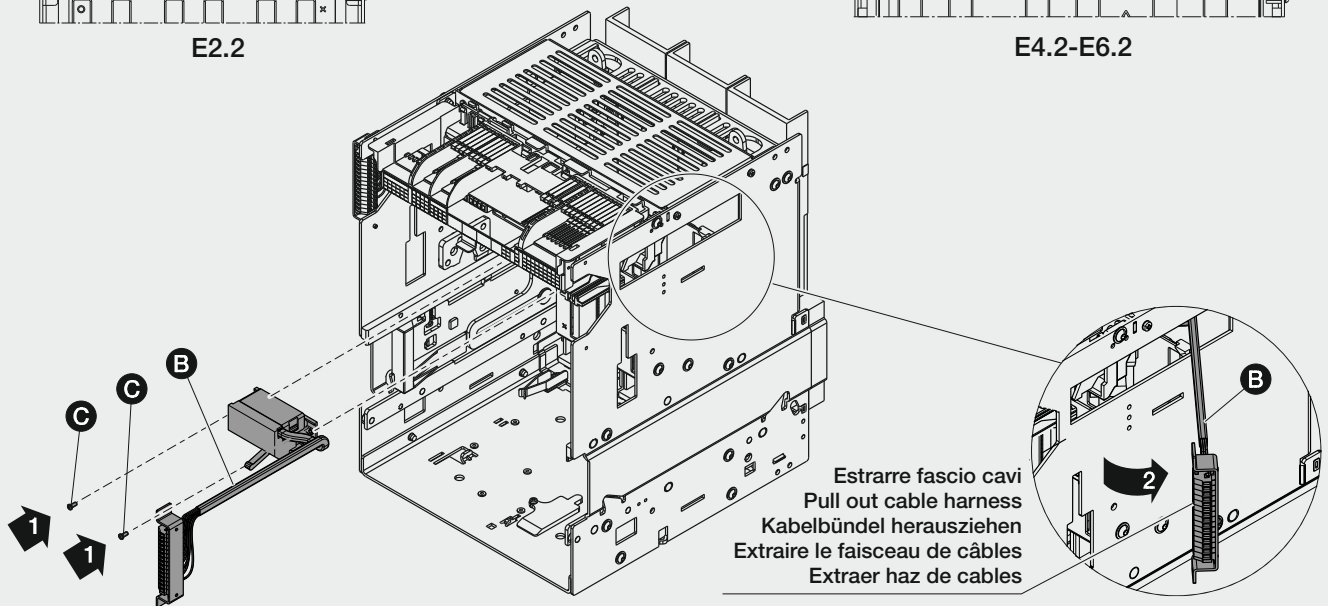

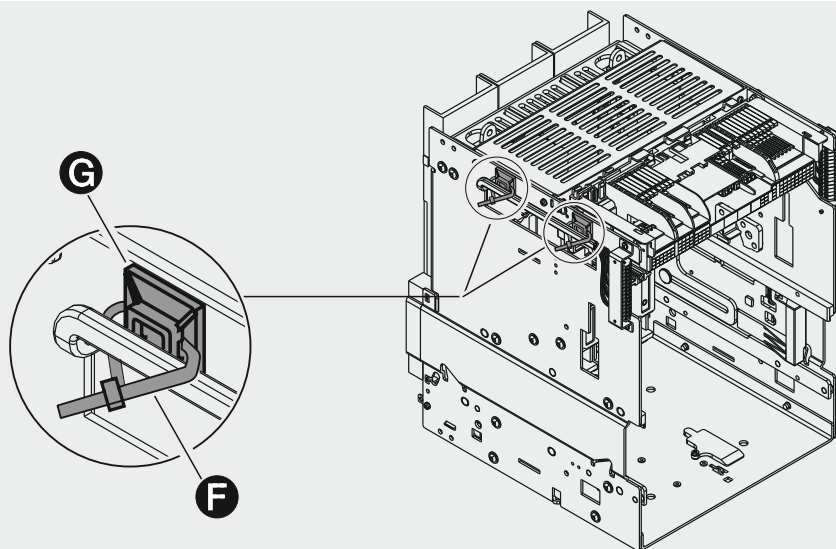

*In alternativa alla fig.96A
 *As alternative to fig.96A
 *Als Alternative zu Abb.96A
 *En alternative au fig.96A
 *Como alternativa a fig.96A

**In alternativa alla fig.96
 **As alternative to fig.96
 **Als Alternative zu Abb.96
 **En alternative au fig.96
 **Como alternativa a fig.96

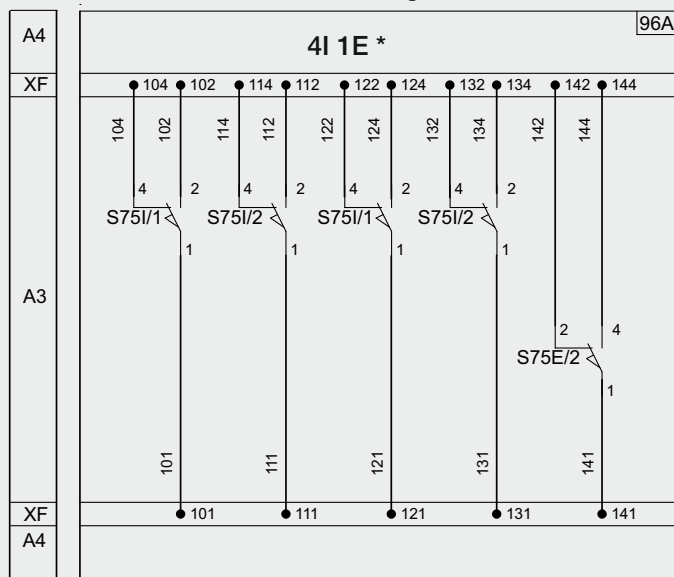
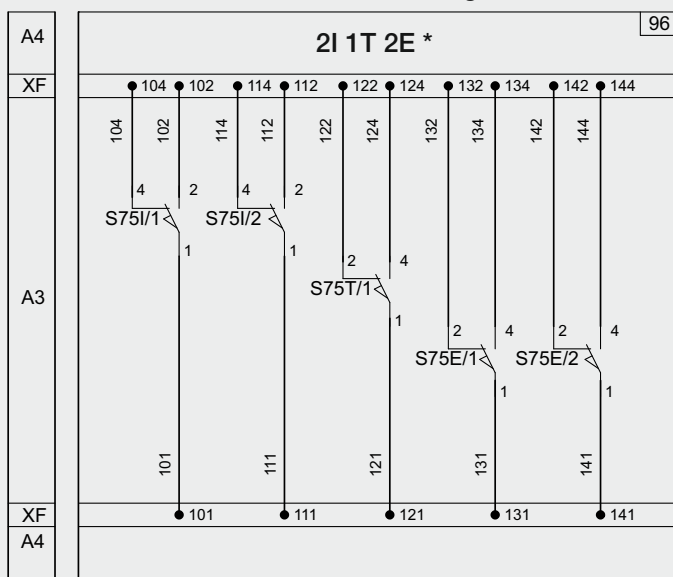


Schema elettrico con interruttore in posizione inserito
 Circuit diagram with circuit-breaker in racked-in position
 Schaltbild mit Leistungsschalter in der Betriebsstellung garantiert
 Schéma électrique avec le disjoncteur en position embroché
 Esquema eléctrico con interruptor en posición insertado

2I 1T 2E Fig.96	Contact	Pins	Inserito Connected	Test	Estratto Disconnected
	S75I/1	101-102	0	1	1
	S75I/1	101-104	1	0	0
	S75I/2	111-112	0	1	1
	S75I/2	111-114	1	0	0
	S75T/1	121-122	1	0	1
	S75T/1	121-124	0	1	0
	S75E/1	131-132	1	1	0
	S75E/1	131-134	0	0	1
	S75E/2	141-142	1	1	0
	S75E/2	141-144	0	0	1
4I 1E Fig.96A	Contact	Pins	Inserito Connected	Test	Estratto Disconnected
	S75I/1	101-102	0	1	1
	S75I/1	101-104	1	0	0
	S75I/2	111-112	0	1	1
	S75I/2	111-114	1	0	0
	S75I/3	121-122	0	1	1
	S75I/3	121-124	1	0	0
	S75I/4	131-132	0	1	1
	S75I/4	131-134	1	0	0
	S75E/1	141-142	1	1	0
	S75E/1	141-144	0	0	1

*In alternativa alla fig.98
 *As alternative to fig.98
 *Als Alternative zu Abb.98
 *En alternative au fig.98
 *Como alternativa a fig.98

**In alternativa alla fig.97
 **As alternative to fig.97
 **Als Alternative zu Abb.97
 **En alternative au fig.97
 **Como alternativa a fig.97

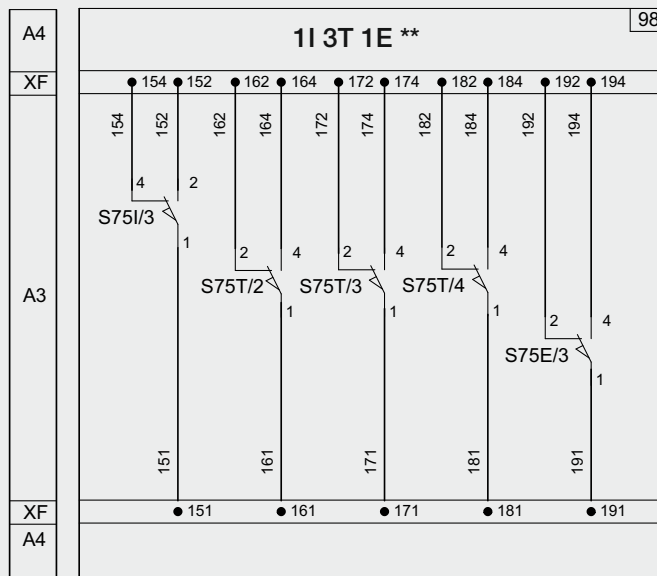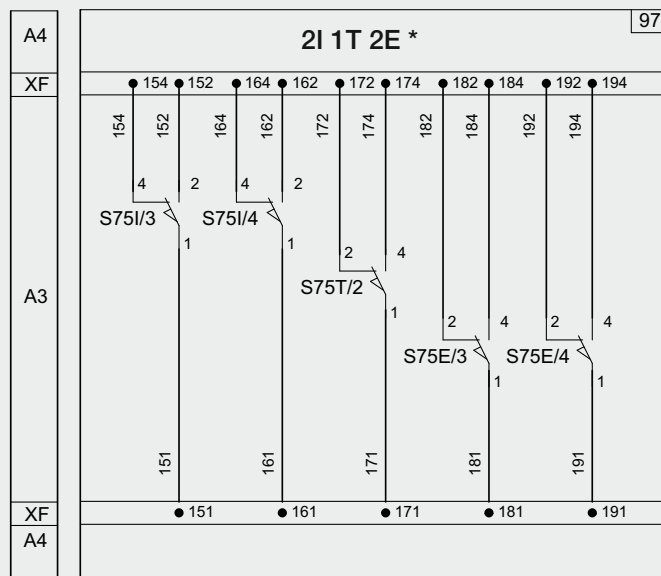

Schema elettrico con interruttore in posizione inserito
 Circuit diagram with circuit-breaker in racked-in position
 Schaltbild mit Leistungsschalter in der Betriebsstellung garantiert
 Schéma électrique avec le disjoncteur en position embroché
 Esquema eléctrico con interruptor en posición insertado

2I 1T 2E Fig.97	Contact	Pins	Inserito Connected	Test	Estratto Disconnected
	S75I/3	151-152	0	1	1
	S75I/3	151-154	1	0	0
	S75I/4	161-162	0	1	1
	S75I/4	161-164	1	0	0
	S75T/2	171-172	1	0	1
	S75T/2	171-174	0	1	0
	S75E/3	181-182	1	1	0
	S75E/3	181-184	0	0	1
	S75E/4	191-192	1	1	0
	S75E/4	191-194	0	0	1

1I 3T 1E Fig.98	Contact	Pins	Inserito Connected	Test	Estratto Disconnected
	S75I/3	151-152	0	1	1
	S75I/3	151-154	1	0	0
	S75T/1	161-162	1	0	1
	S75T/1	161-164	0	1	0
	S75T/2	171-172	1	0	1
	S75T/2	171-174	0	1	0
	S75T/3	181-182	1	0	1
	S75T/3	181-184	0	1	0
	S75E/3	191-192	1	1	0
	S75E/3	191-194	0	0	1

For more information please contact:

ABB S.p.A.
 ABB SACE Division
 Via Pescaria, 5
 24123 Bergamo - Italy