

SACE Tmax XT IEC-UL

Istruzioni di installazione parte fissa di interruttore rimovibile XT2
 Installation instructions fixed part for plug-in circuit breakers XT2
 Installationsanleitung festteil für leistungsschalter in ausfahrbarer ausführung XT2
 Instructions pour l'installation partie fixe pour disjoncteur debrochable XT2
 Instrucciones de instalación parte fija para interruptor extraíble XT2
 安装说明书 插入式断路器固定部分 XT2

III-IV

III-IV

		LENGHT 16mm (0.63")	M M4	M M4	M M4	M M4		
P	III	x4	x4	x8	x4	x1	-	x4
	IV	x4	x4	x8	x4	x1	-	x6
W	III	x4	x4	x8	x4	-	x1	x4
	IV	x4	x4	x8	x4	-	x1	x6

1

III-IV

Usare cavi o barre isolate/ o eseguire prove di tipo specifiche sull' installazione.

Use cable or insulated busbars/ or perform specific type test on the installation.

Kabel oder isolierte Sammelschienen verwenden / oder die spezifische Typprüfung auf derInstallation durchführen.

Utiliser un câble ou des barres isolées/ ou réaliser un test de type spécifique sur installation.

Utilizar un cable o barras aisladas / o efectuar una prueba de tipo específico sobre instalacion.


使用电缆或经绝缘处理的母排，否则需对安装进行指定的型式试验

2


III-IV

CLICK!
OK!


3 III-IV P Fixing at 70mm/2.76"

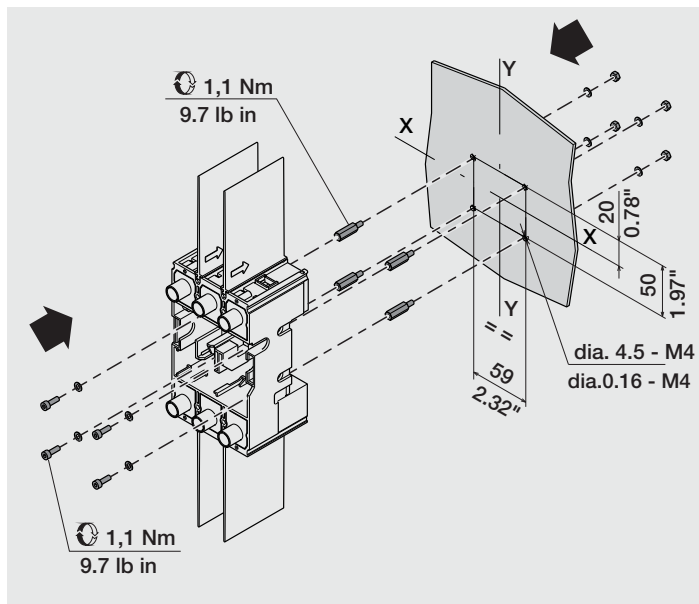


4 III-IV P Fixing at 50mm/1.97"

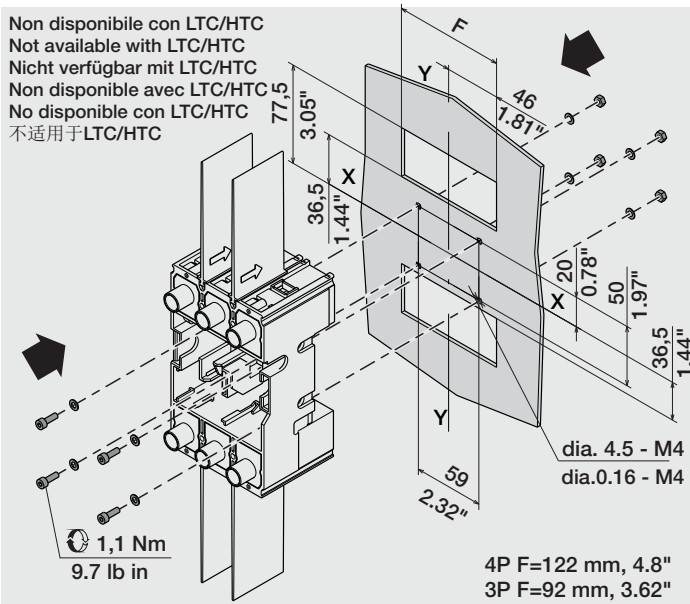


5 III-IV P

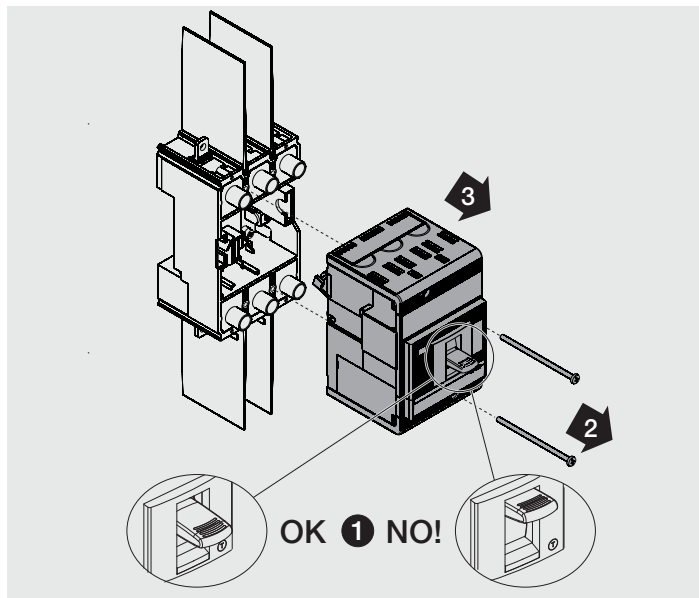

6 III-IV P

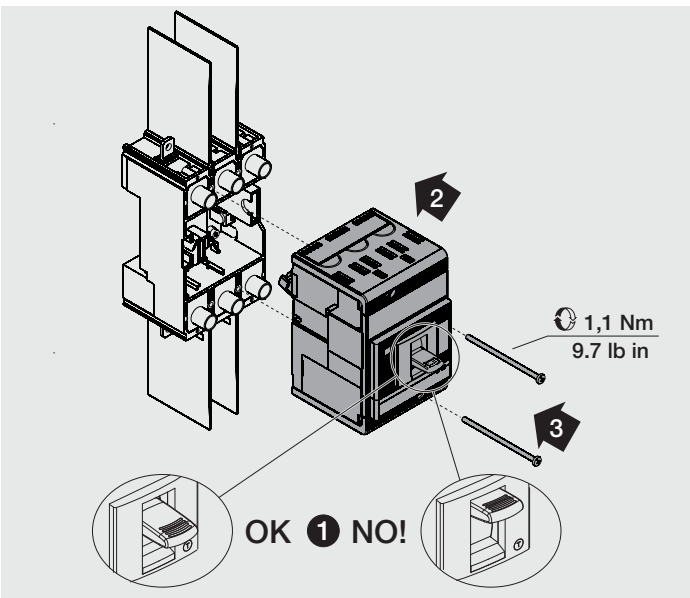


7 III-IV P

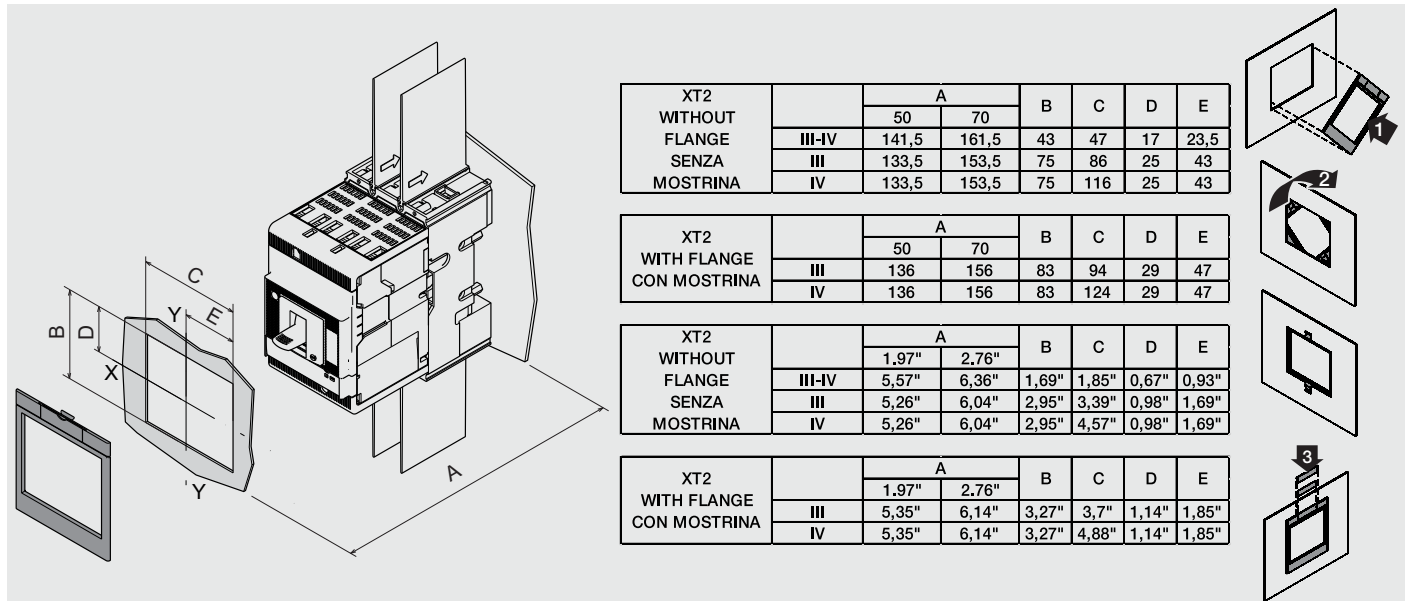

8


III-IV W Fixing at 70 mm/2.76"

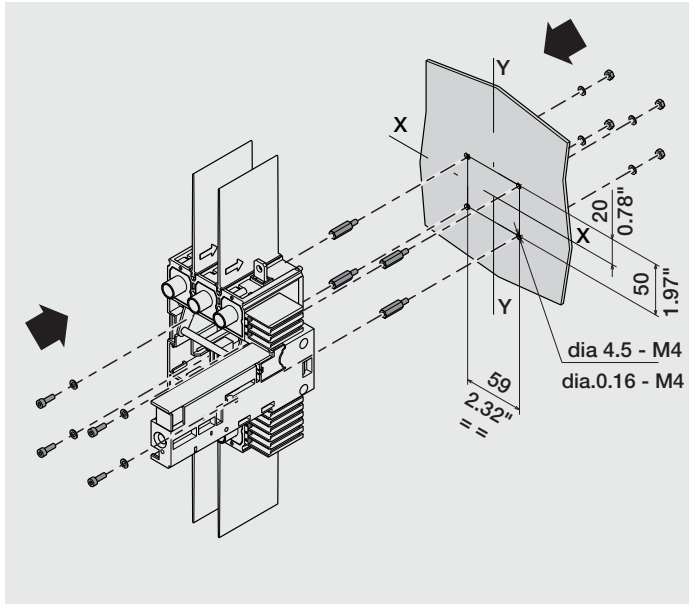

9

III-IV W Fixing at 50 mm/1.97"


Non disponibile con LTC/HTC
 Not available with LTC/HTC
 Nicht verfügbar mit LTC/HTC
 Non disponible avec LTC/HTC
 No disponible con LTC/HTC
 不适用于LTC/HTC

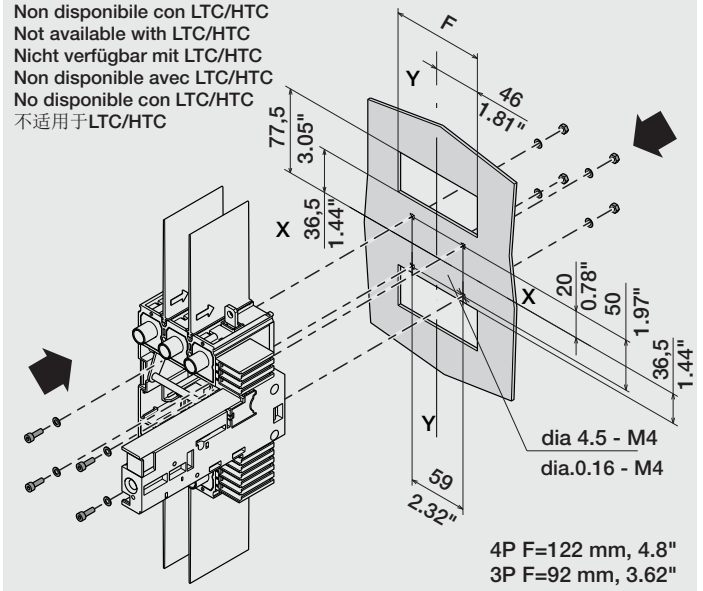

4P F=122 mm, 4.8"
 3P F=92 mm, 3.62"



10

III-IV W

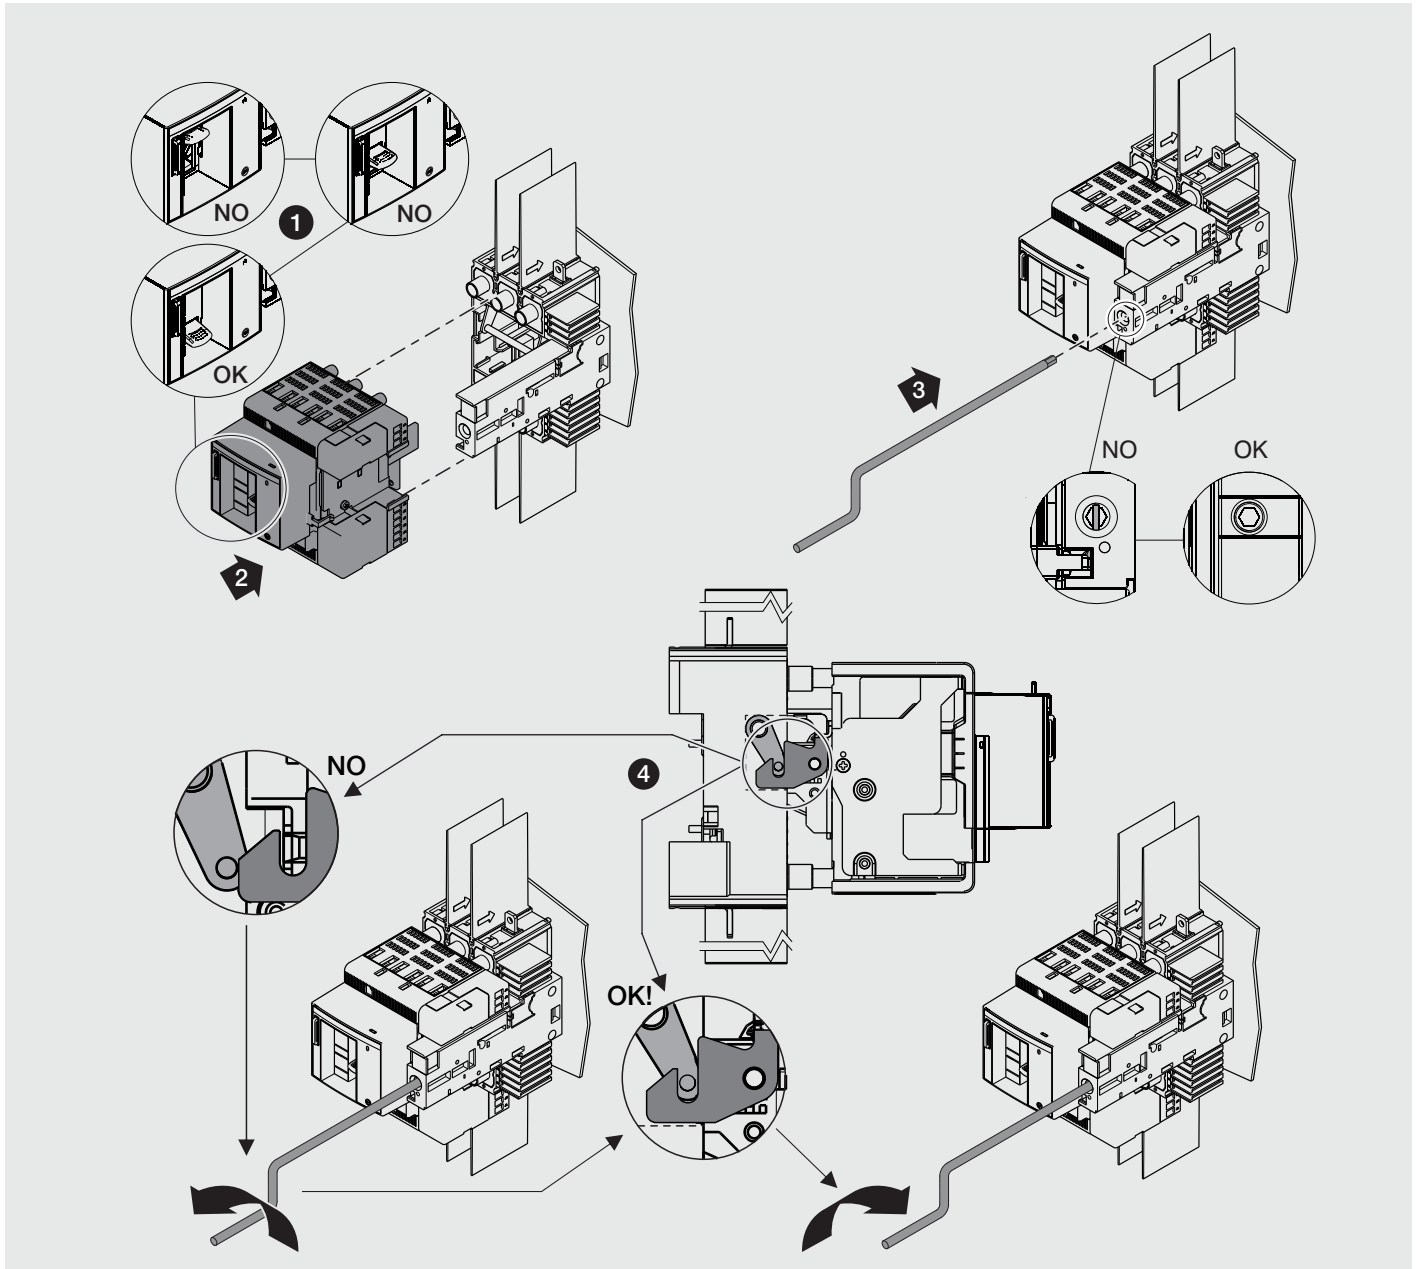


XT2 W WITH FLANGE CON MOSTRINA	III-IV	A		B	C	D	E	F
		50	70					
		170	190	91	101	55	50,5	5,14


XT2 W WITH FLANGE CON MOSTRINA	III-IV	A		B	C	D	E	F
		1.97"	2.76"					
		6,69"	7,48"	3,58"	3,97"	2,16"	1,99"	0,2"

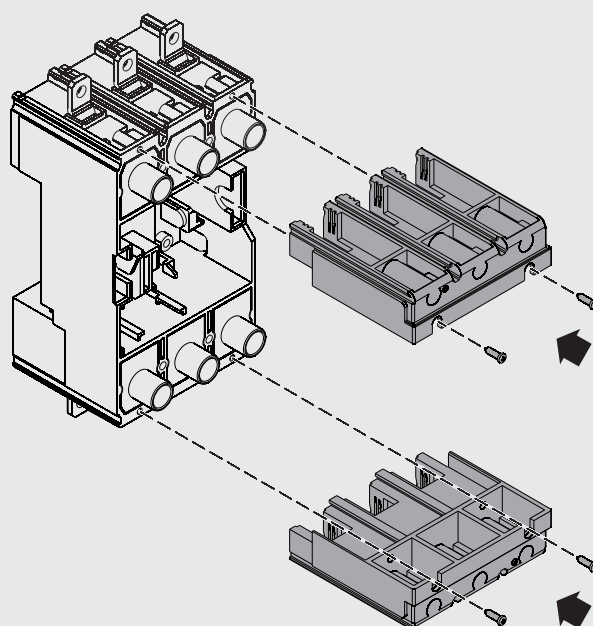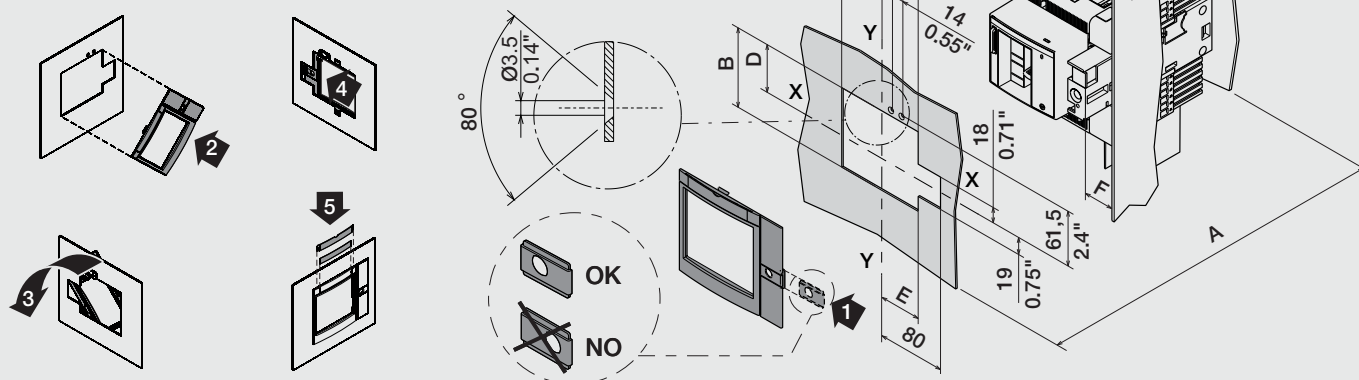



Only for:
FC Cu
FC Cu AL
MC

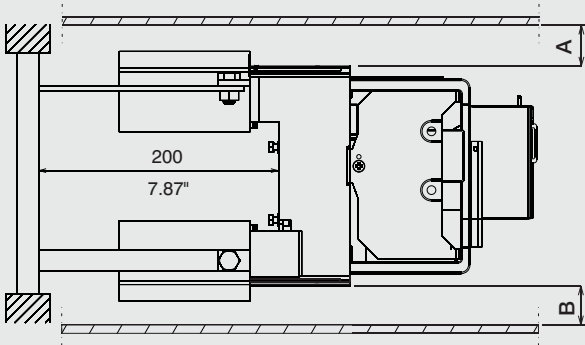

Example busbars and cables 16÷70mm²

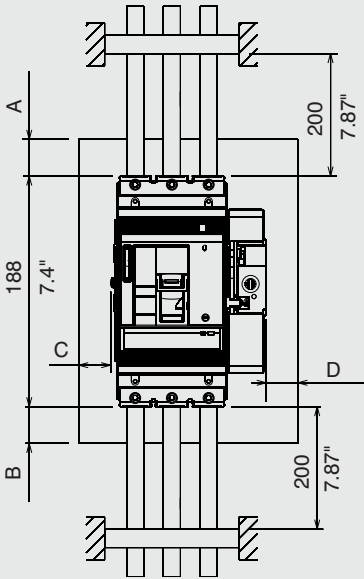


Example cables 2,5÷10mm²

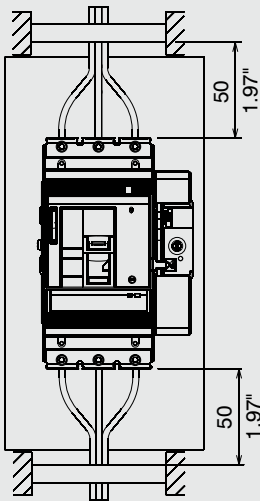


Ue	A	B	C	D
AC ≥440V	50	45	20	0
AC <440V	30	25	10	0
DC ≤250V	50	45	50	30
250V<DC≤500V	50	45	50	30








Ue	A	B	C	D
AC ≥440V	1.97"	1.77"	0.79"	0
AC <440V	1.18"	0.98"	0.39"	0
DC ≤250V	1.97"	1.77"	1.97"	1.18"
250V<DC≤500V	1.97"	1.77"	1.97"	1.18"

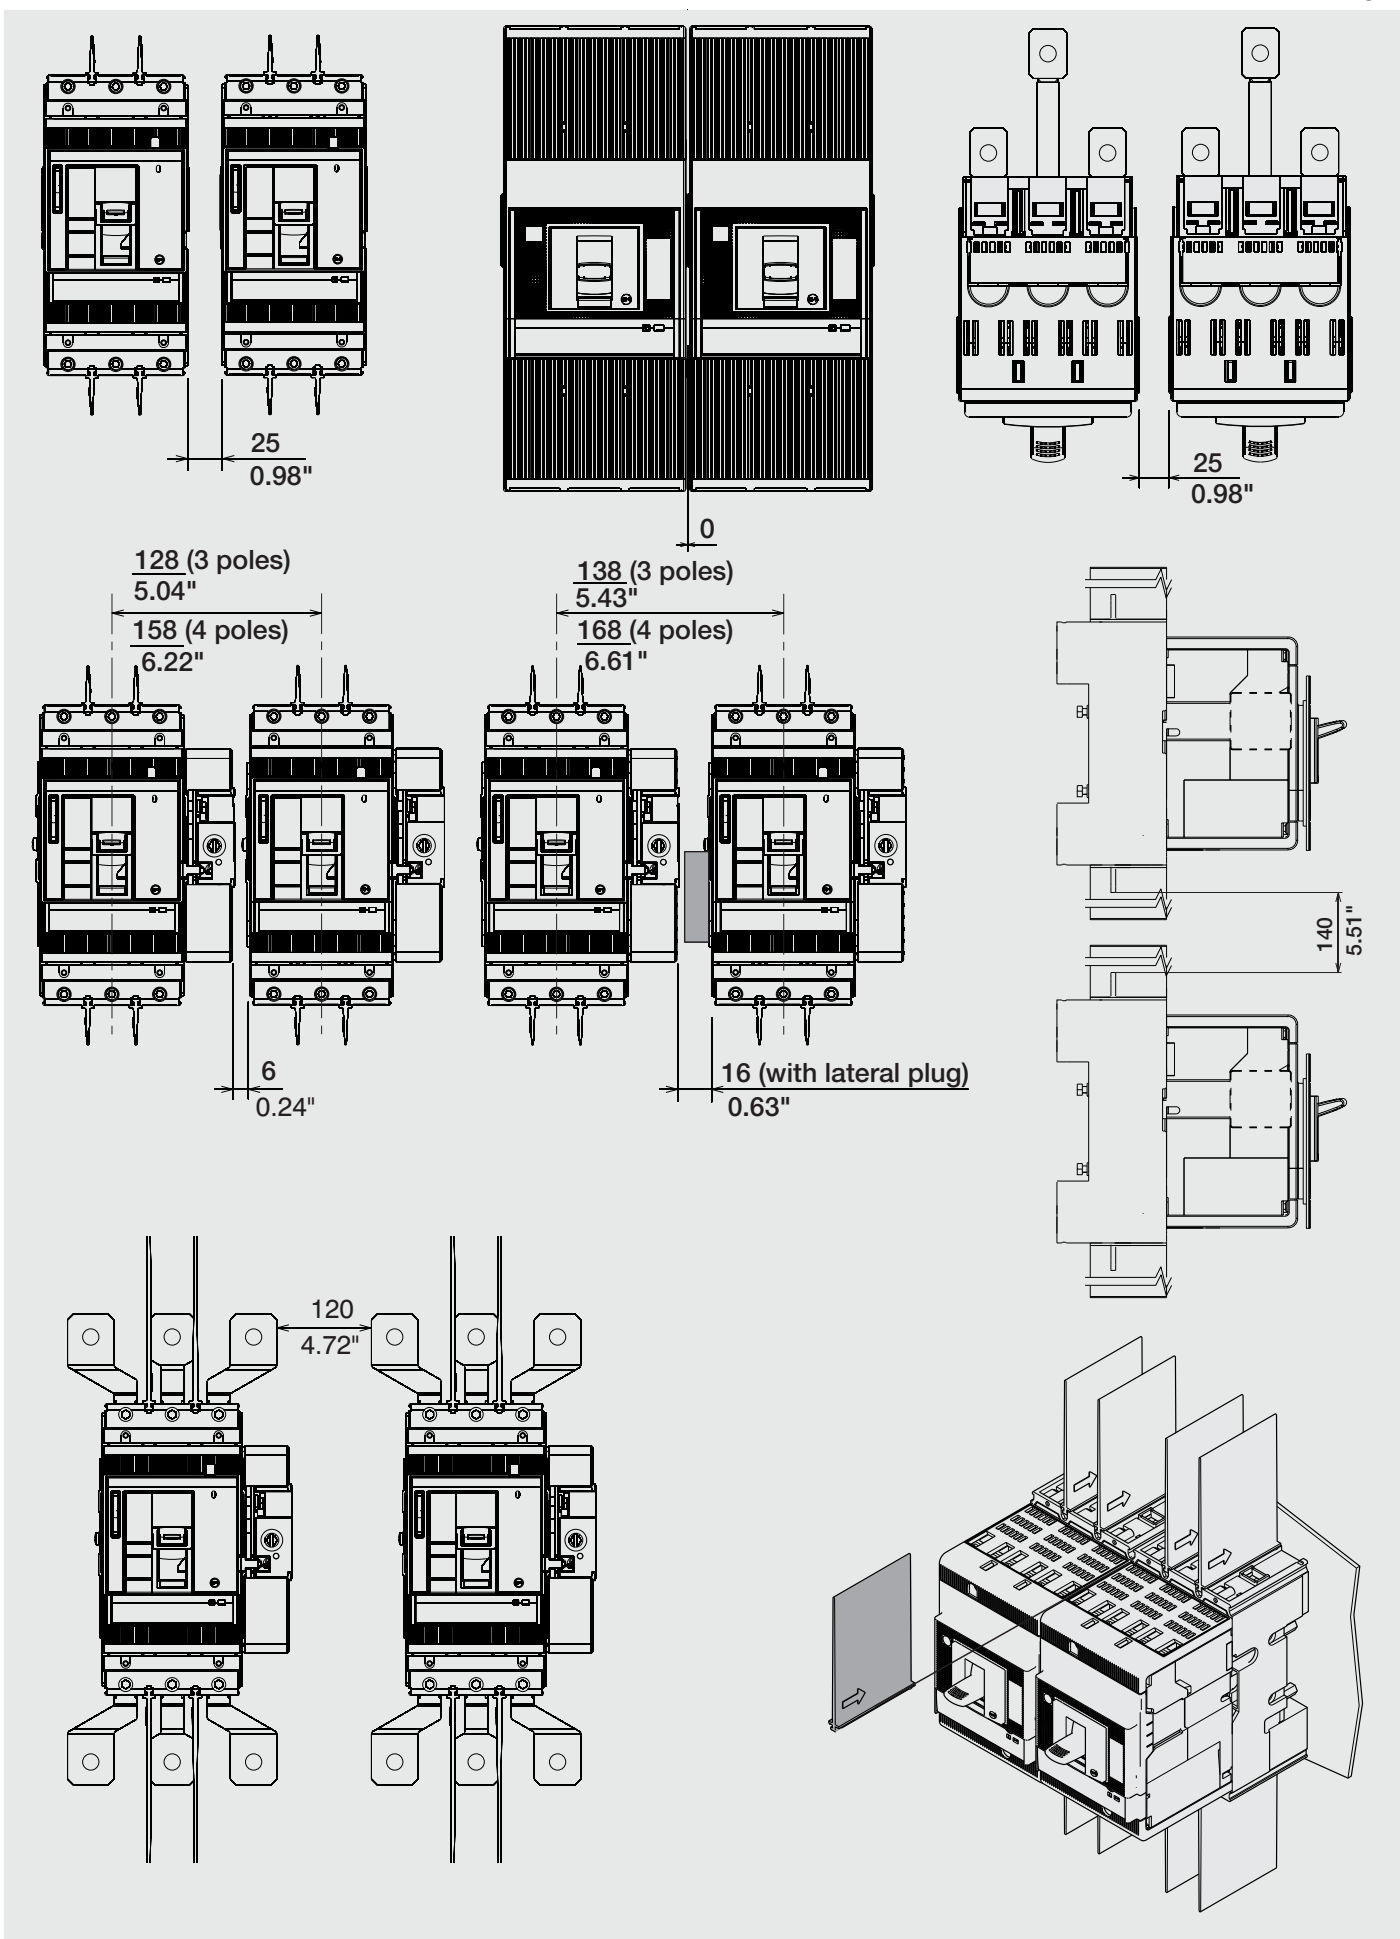

Example busbars and
cables 6 AWG... 1/0 AWG

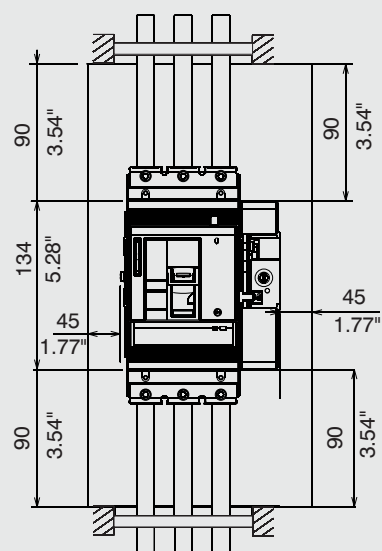

Example cables
8 AWG...14 AWG

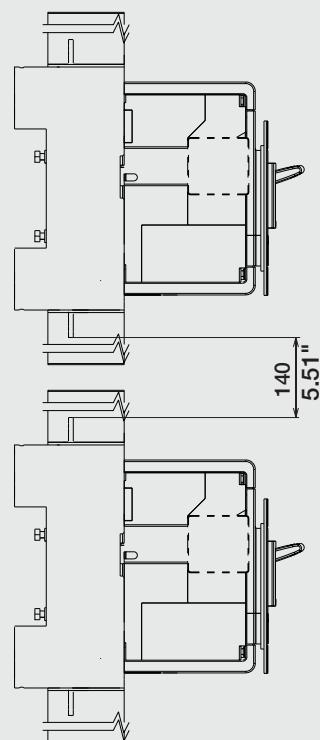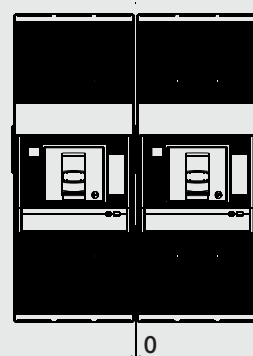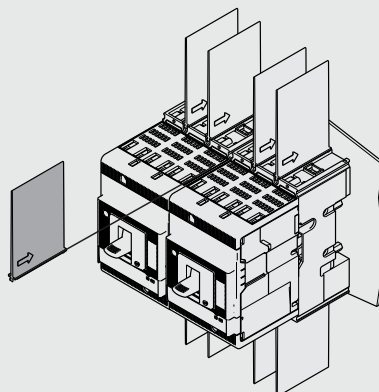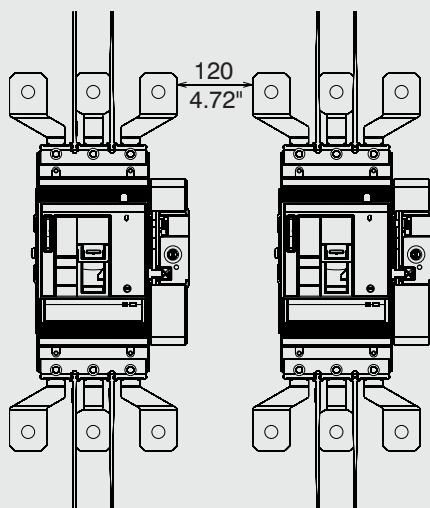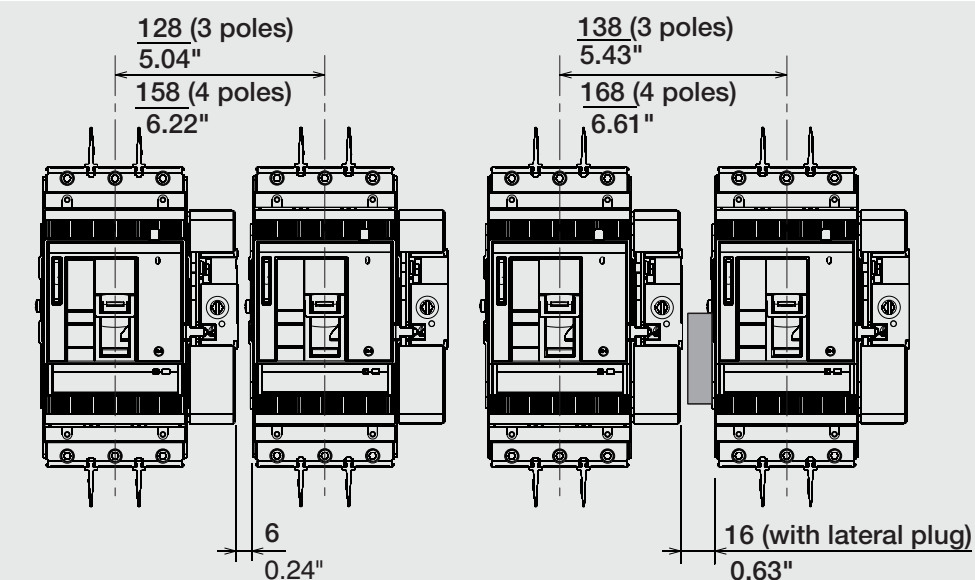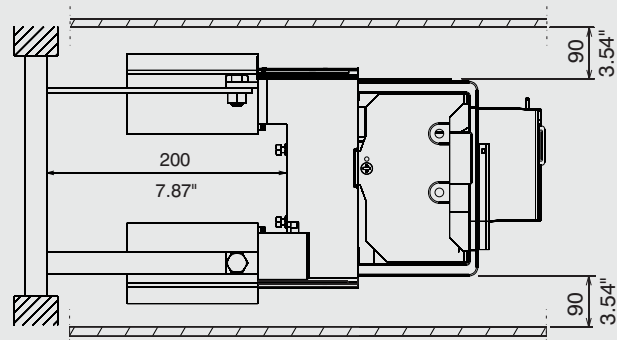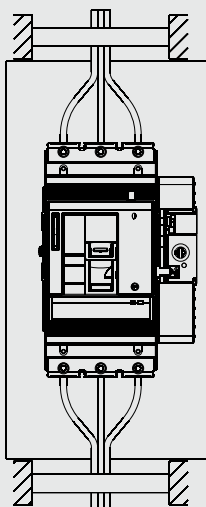

Terminali Terminals Anschlusse Prises Terminales 端子类型	Codici Codes Codes Codes Códigos 物料编号	Istruzioni d'installazione Installation instructions Installationsanleitung Instructions pour l'installation Instrucciones de instalación 安装说明	Dimensioni di ingombro Overall dimensions Abmessungen Dimensions d'encombrement Dimensiones generales 全部尺寸
EF	1SDA066260R1 3pcs	1SDH000719R0817	1SDH000721R0108 P 1SDH000721R0113 W
	1SDA066261R1 4pcs		
ES	1SDA066889R1 3pcs	1SDH000719R0805	1SDH000721R0105 P 1SDH000721R0110 W
	1SDA066890R1 4pcs		
	1SDA066891R1 6pcs		
	1SDA066892R1 8pcs		
FC Cu	1SDA066905R1 3pcs	1SDH000719R0807	1SDH000721R0107 P 1SDH000721R0112 W
	1SDA066906R1 4pcs		
	1SDA066907R1 6pcs		
	1SDA066908R1 8pcs		
FC Cu Al 1...95mm²	1SDA067151R1 3pcs	1SDH000719R0806	1SDH000721R0106 P 1SDH000721R0111 W
	1SDA067152R1 4pcs		
	1SDA067153R1 6pcs		
	1SDA067154R1 8pcs		
FC Cu Al 70...95mm²	1SDA067151R1 3pcs	1SDH000719R0806	1SDH000721R0106 P 1SDH000721R0111 W
	1SDA067152R1 4pcs		
	1SDA067153R1 6pcs		
	1SDA067154R1 8pcs		
FC Cu Al 2x35...95mm²	1SDA067155R1 3pcs	1SDH000719R0816	1SDH000721R0106 P 1SDH000721R0111 W
	1SDA067156R1 4pcs		
	1SDA067157R1 6pcs		
	1SDA067158R1 8pcs		
FC Cu Al 120...240mm²	1SDA067159R1 3pcs	1SDH000719R0643	
	1SDA067160R1 4pcs		
	1SDA067161R1 6pcs		
	1SDA067162R1 8pcs		
MC	1SDA066921R1 3pcs	1SDH000719R0808	1SDH000721R0107 P 1SDH000721R0112 W
	1SDA066922R1 4pcs		
	1SDA066923R1 6pcs		
	1SDA066924R1 8pcs		
HR/VR	1SDA066268R1 3pcs	1SDH000719R0813	1SDH000721R0109 P 1SDH000721R0114 W
	1SDA066269R1 4pcs		

Terminali
Terminals
Anschlusse
Prises
Terminales
端子类型

Codici
Codes
Codes
Codes
Códigos
物料编号

Istruzioni d'installazione
Installation instructions
Installationsanleitung
Instructions pour l'installation
Instrucciones de instalación
安装说明

Dimensioni di ingombro
Overall dimensions
Abmessungen
Dimensions d'encombrement
Dimensiones generales
全部尺寸

EF

1SDA066260R1	3pcs
1SDA066261R1	4pcs

[1SDH000719R0817](#)

[1SDH000721R0108](#) **P**
[1SDH000721R0113](#) **W**

ES

1SDA066889R1	3pcs
1SDA066890R1	4pcs
1SDA066891R1	6pcs
1SDA066892R1	8pcs

[1SDH000719R0805](#)

[1SDH000721R0105](#) **P**
[1SDH000721R0110](#) **W**

FC-Cu

1SDA075881R1	3pcs
1SDA075882R1	4pcs
1SDA075883R1	6pcs
1SDA075884R1	8pcs

[1SDH000719R0807](#)

[1SDH000721R0107](#) **P**
[1SDH000721R0112](#) **W**

MC

1SDA075901R1	3pcs
1SDA075902R1	4pcs
1SDA075903R1	6pcs
1SDA075904R1	8pcs

[1SDH000719R0808](#)

[1SDH000721R0107](#) **P**
[1SDH000721R0112](#) **W**

For more information please contact:

ABB S.p.A.
Via Pescaria, 5
24123 Bergamo - Italy
Phone: +39 035 395 111