

			Draw	Barbarani R.	08.03.21
			Checked	Balbiano C.	08.03.21
ECN		Name	Revision	1	3.12.14



Power Protection
6572–Quartino, Switzerland


Mechanical Outline

TLE 400 kW UL
with eBOOST technology

Product Upgrade Letter: A



Series: 2 0001050347

FRONT VIEW WITH
SAFETY PANEL REMOVED

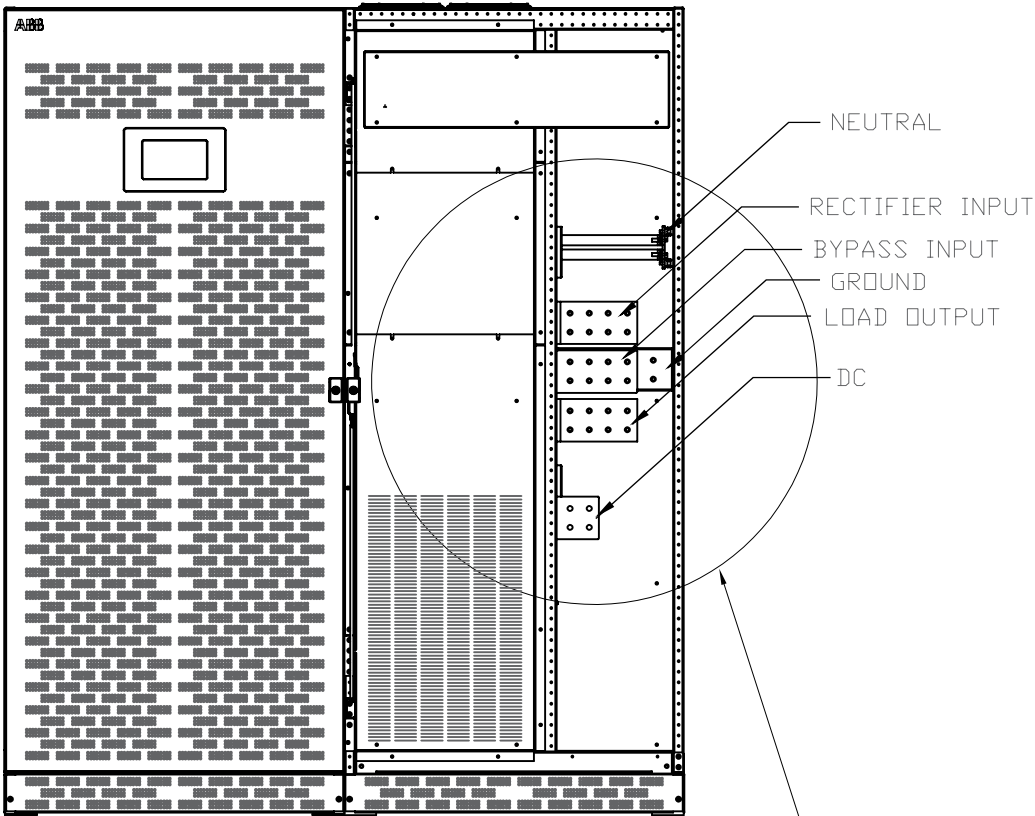

DETAIL A

SIDE VIEW WITH
SAFETY PANEL REMOVED

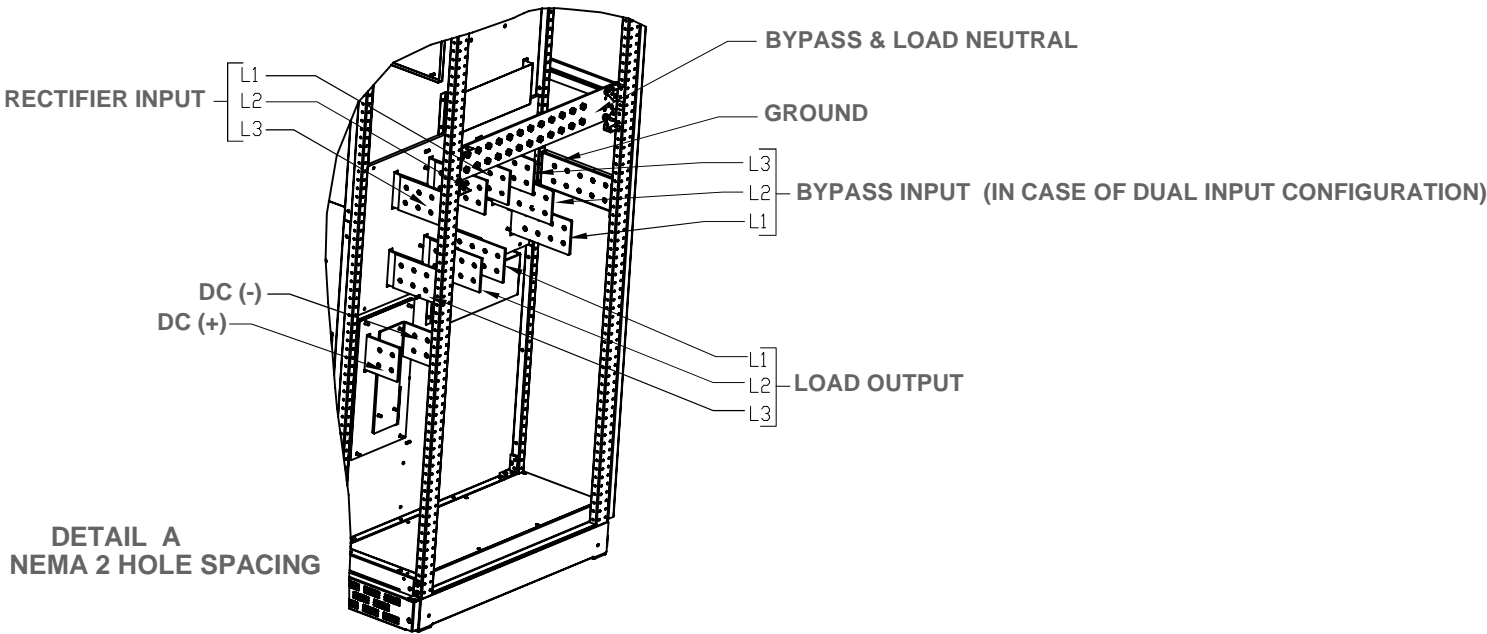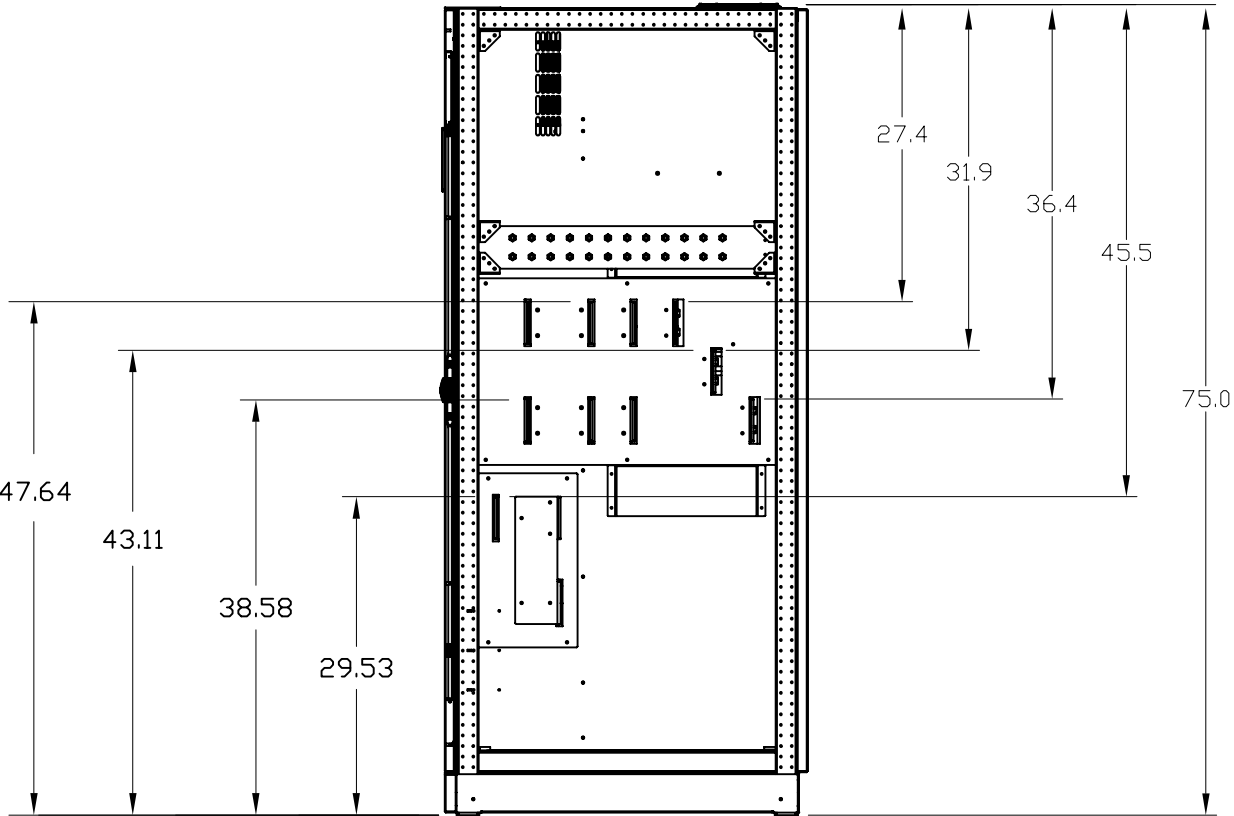

DETAIL A
NEMA 2 HOLE SPACING

Maximum Allowed Cable Configuration

kW	Rectifier Input	Bypass Input	DC Input	Output (Load)	GND
400	4 x 4/0 AWG	4 x 3/0 AWG	4 x 400 Kcmil	4 x 3/0 AWG	1 x 2/0 AWG

* Actual cable size and quantity must be based on the requirements of NFPA 70 and must not exceed the limits listed above.

			Draw	Barbarani R.	25.03.20
			Checked	Balbiano C.	25.03.20
ECN		Name	Revision	1	25.03.20



Power Protection
6572-Quartino, Switzerland

Mechanical Outline

TLE 400 kW UL
with eBOOST technology

Product Upgrade Letter: A

Series: 2 0001050347

Page 2
of 2