


DO573

Digital output module

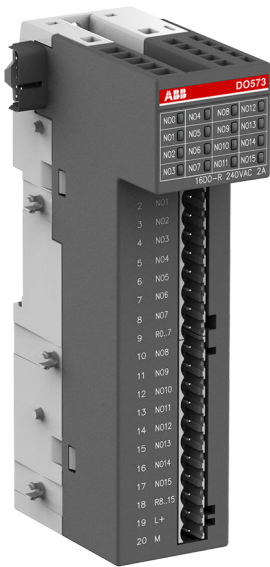


1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 231 300 R0000	DO573, digital output module, 16 DO, relay output	Active
1TNE 968 901 R3101	Terminal block TA563-9, 9 pins, screw front, cable side, 6 pieces per unit	Active
1TNE 968 901 R3102	Terminal block TA563-11, 11 pins, screw front, cable side, 6 pieces per unit	Active
1TNE 968 901 R3103	Terminal block TA564-9, 9 pins, screw front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3104	Terminal block TA564-11, 11 pins, screw front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3105	Terminal block TA565-9, 9 pins, spring front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3106	Terminal block TA565-11, 11 pins, spring front, cable front, 6 pieces per unit	Active



*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

2 Dimensions

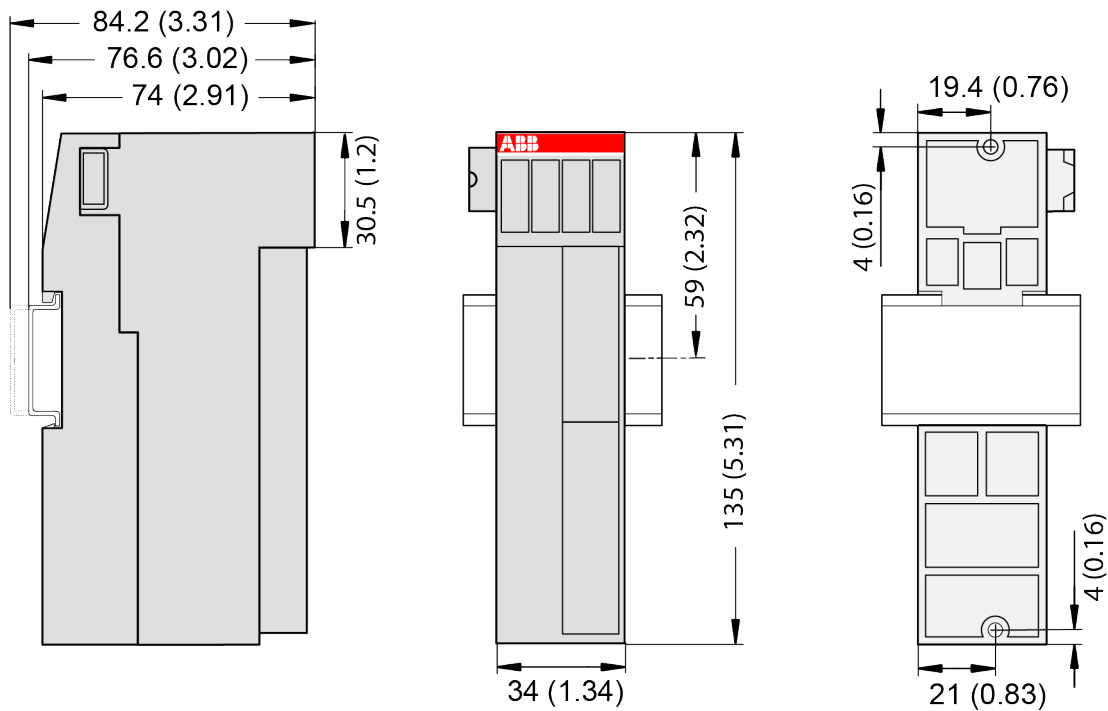

The dimensions are in mm and in brackets in inch.

3 Technical data

3.1 Technical data of the module

The system data of AC500-eCo apply.

Only additional details are therefore documented below.

Parameter		Value
Process supply voltage L+		
	Connections	Terminals 19 for L+ (+24 V DC) and 20 for M (0 V DC)
	Rated value	24 V DC
	Current consumption via L+	50 mA
	Max. ripple	5 %
	Protection against reversed voltage	Yes
	Rated protection fuse for L+	Recommended; the outputs must be protected by an 5 A fast-acting fuse
Current consumption from 24 V DC power supply at the L+/UP and M/ZP terminals of the CPU/communication interface module		Ca. 5 mA

Parameter	Value
Galvanic isolation	Yes, between the output groups and the rest of the module
Isolated groups	2 (8 channels per group)
Surge-voltage (max.)	35 V DC for 0.5 s
Max. power dissipation within the module	2.0 W
Weight	Ca. 160 g
Mounting position	Horizontal or vertical
Cooling	The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.

No effects of multiple overloads

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

3.2 Technical data of the digital outputs

Parameter	Value
Number of channels per module	16 normally-open relay outputs
Distribution of the channels into groups	2 (8 channels per group)
Connection of the channels NO0 ... NO7	Terminals 1 ... 8
Connection of the channels NO8 ... NO15	Terminals 10 ... 17
Reference potential for the channels NO0 ... NO7	Terminal 9 (signal name R0 ... 7)
Reference potential for the channels NO8 ... NO15	Terminal 18 (signal name R8 ... 15)
Relay coil power supply	Terminals 19 and 20 (signal names L+ and M)
Indication of the output signals	1 yellow LED per channel; the LED is on when the output signal is high (signal 1) and the module is powered via the I/O bus
Way of operation	Non-latching type
Relay output voltage	
Rated value	24 V DC or 120/240 V AC
Output delay	
Switching 0 to 1 (max.)	Typ. 10 ms
Switching 1 to 0 (max.)	Typ. 10 ms
Output data length	2 bytes
Output current	
Rated current per channel (max.)	2.0 A (24 V DC / 24 V AC / 48 V AC / 120 V AC / 240 V AC, only resistive loads) 2.0 A (24 V AC / 48 V AC / 120 V AC, only pilot duty) 1.5 A (240 V AC, only pilot duty)
Rated current per group (max.)	10 A
Lamp load (max.)	200 W (230 V AC), 30 W (24 V DC)

Parameter		Value
Spark suppression with inductive AC loads		Must be performed externally according to driven load specification
Switching Frequencies		
	With resistive loads	Max. 1 Hz
	With inductive loads	On Request
	With lamp loads	Max. 1 Hz
Output type		Non-protected
Protection type		External fuse ¹⁾
Rated protection fuse		5 A fast
Short-circuit-proof / Overload-proof		No, should be provided by an external fuse or circuit breaker
	Overload message	No
	Output current limitation	No
Connection of 2 outputs in parallel		Not possible
Lifetime of relay contacts (cycles)		100.000 at rated load
Max. cable length		
	Shielded	500 m
	Unshielded	150 m

¹⁾ Per group in case of group fuse protection. For each channel in case of channel-by-channel fuse protection. The maximum current per group must not be exceeded.

4 System data AC500-eCo

4.1 Environmental conditions

Table 1: Process and supply voltages

Parameter		Value
24 V DC		
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
24 V AC		
	Voltage	24 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
100 V AC ... 240 V AC wide-range supply		
	Voltage	100 V ... 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2		
	DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s

**NOTICE!****Risk of damaging the PLC due to improper voltage levels!**

- Never exceed the maximum tolerance values for process and supply voltages.
 - Never fall below the minimum tolerance values for process and supply voltages.
- Observe the **system data** and the **technical data** of the used module.

**NOTICE!**

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz

**NOTICE!**

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	0 °C ... +60 °C (horizontal mounting of modules) 0 °C ... +40 °C (vertical mounting of modules and output load reduced to 50 % per group)
	Storage	-40 °C ... +70 °C
	Transport	-40 °C ... +70 °C
Humidity		Max. 95 %, without condensation
Air pressure		
	Operating	> 800 hPa / < 2000 m
	Storage	> 660 hPa / < 3500 m

4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

4.3 Power supply units



AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.

For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.

Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.



Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)

To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.



WARNING!

Improper installation can lead to death by touching hazardous voltages!

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

4.4 Electromagnetic compatibility

Table 2: Range of use

Application
Device suitable only as <i>Control Equipment for Industrial Applications</i> .

Table 3: Electromagnetic compatibility

Parameter	Value
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications. IEC 61131-2, zone B 🔗 Chapter 4.6 “Approvals and certifications” on page 8	
Radiated emission according to IEC 61000-6-4 CISPR11, class A	Yes

Parameter	Value
Conducted emission according to IEC 61000-6-4 CISPR11, class A	Yes
Electrostatic discharge (ESD) according to IEC 61000-4-2, criterion B	Air discharge: 8 kV Contact discharge: 6 kV
Fast transient interference voltages (burst) according to IEC 61000-4-4, criterion B	Power supply (DC): 2 kV Digital inputs/outputs (24 V DC): 1 kV Digital inputs/outputs (240 V AC): 2 kV Analog inputs/outputs: 1 kV Communication lines shielded: 1 kV
High energy transient interference voltages (surge) according to IEC 61000-4-5, criterion B	Power supply (DC): - Line to ground: 1 kV - Line to line: 0,5 kV Digital inputs/outputs/relay: (24 V DC): - Line to ground: 1 kV (AC): - Line to ground: 2 kV - Line to line: 1 kV Analog inputs/outputs: - Line to ground: 1 kV Communication lines: - Line to ground: 1 kV
Influence of radiated disturbances IEC 61000-4-3, criterion A	Test field strength: 10 V/m
Influence of line-conducted interferences IEC 61000-4-6, criterion A	Test voltage: 10 V
Power frequency magnetic fields IEC 61000-4-8, criterion A	30 A/m 50 Hz 30 A/m 60 Hz

4.5 Mechanical data

Parameter	Value
Mounting	Horizontal/Vertical
Wiring method	Spring/screw terminals
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> with all modules or option boards plugged in with all terminals plugged in with all covers closed
Housing	Classification V-0 according to UL 94

Parameter	Value
Vibration resistance (sinusoidal) acc. to IEC 60068-2-6	All three axes 2 Hz ... 8.4 Hz, 3.5 mm peak, 8.4 Hz ... 150 Hz, 1 g
Shock test acc. to IEC 60068-2-27	All three axes 15 g, 11 ms, half-sinusoidal
Mounting of the modules:	
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm

4.6 Approvals and certifications

The PLC Automation catalog contains an [overview of the available approvals and certifications](#).