



SurgePro™

AC power surge protective device – THQLSURGE



AC power surge protective device for the entire home or office – computers, TV, appliances and all other sensitive electronic equipment

Benefits

- Mitigates against surge damage caused by lightning and utility switching events
- Installs in your PowerMark™ load center (the best location for protecting all AC circuits in your home) directly onto the bus
- Up to 25,000 ampere surge capacity per phase
- Meets newest UL 1449 4th edition surge protection requirements
- 3-year, \$15,000 connected equipment warranty (from date of purchase) when installed according to NEC® electrical and safety codes on cULus approved equipment
- Can be installed to meet NEC® 2020 Art. 230.67 SPD requirements for dwelling units at or adjacent to service entrances.

Product features

- Single phase, three wire, 120/240 VAC, 25 kA per phase rated
- UL 1449 4th edition listed (VZCA:E316636 and VZCA7:E316636) as a Type 1 SPD with a 100 kA SCCR rating
- Monolithic, high energy metal oxide varistors per phase with integral thermal and overcurrent protection
- Illuminated LED indicates proper function of protective elements

SurgePro

AC power surge protective device

Technical data

The THQLSURGE is designed for service entrance or subpanel locations. It provides small, easy to install surge protection for the entire home or office. The surge protective device consists of monolithic, high energy metal oxide varistors per phase with integral thermal and overcurrent protection. An illuminated

LED indicates the proper function of the protective elements. The THQLSURGE conveniently connects inside the GE PowerMark load center, directly onto the bus, like a circuit breaker, providing surge protective elements for the entire panel and all attached loads.

Catalog number	Per phase surge current rating ¹	System voltage 50/60 Hz	Transient energy rating, 10/1000 μ S, total	Nominal discharge current In	Configuration	UL 1449 4th edition Voltage Protection Rating (VPR)			
						L-N	N-G	L-G	L-L
THQLSURGE	25 kA	120/240 V	1520 J	10 kA	1 ph 3 wire	500 V	–	–	900 V

¹ Per phase defined as varistor surge current, single pulse 8/20 μ S

THQLSURGE

- Up to 225 amp load centers
- SCCR to 100 kA
- For use in PowerMark load centers
- Can be used to meet NEC® 2020 Art. 230.67

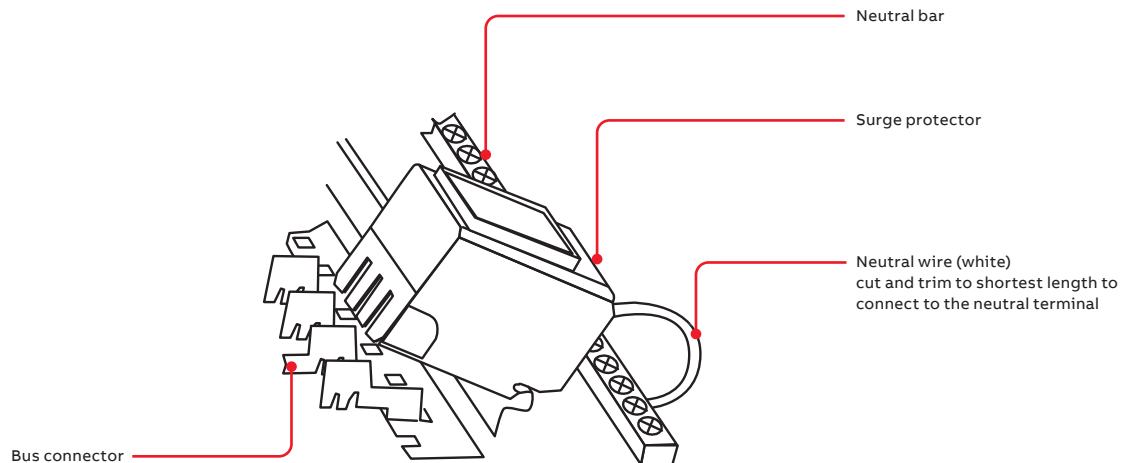


ABB Inc.
305 Gregson Drive
Cary, NC 27511
United States

electrification.us.abb.com

GE is a trademark of GE.
Manufactured by ABB Inc. under license
from General Electric Company.

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. © 2022 ABB. All rights reserved.

NEC is a registered trademark of the National Fire Protection Association, Inc.