

DATA SHEET

MC5141

Memory card



1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 180 100 R0041	MC5141, memory card	Active

Part no.	Description	Product life cycle phase *)	Possible migration device
1TNE 968 901 R0100	MC503, memory card adapter for PM55x-xP or PM56x-xP	Classic	Always included in AC500-eCo V3



*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

Memory card type	AC500 V2	AC500-XC V2	AC500 V3	AC500-XC V3	AC500-eCo V3
MC5141	x	x	x	x	-
MC5102 with TA5350-AD micro memory card adapter	x ¹⁾	x ¹⁾ ²⁾	x	x ²⁾	-
MC5102 without TA5350-AD micro memory card adapter	-	-	-	-	x


¹⁾ As of firmware 2.5.x

2) Temporary use of MC5102 is possible under normal environmental conditions, but MC5141 should be preferred.



Processor modules can be operated with and without (micro) memory card.
Processor modules are supplied without (micro) memory card. It must be ordered separately.

2 Dimensions

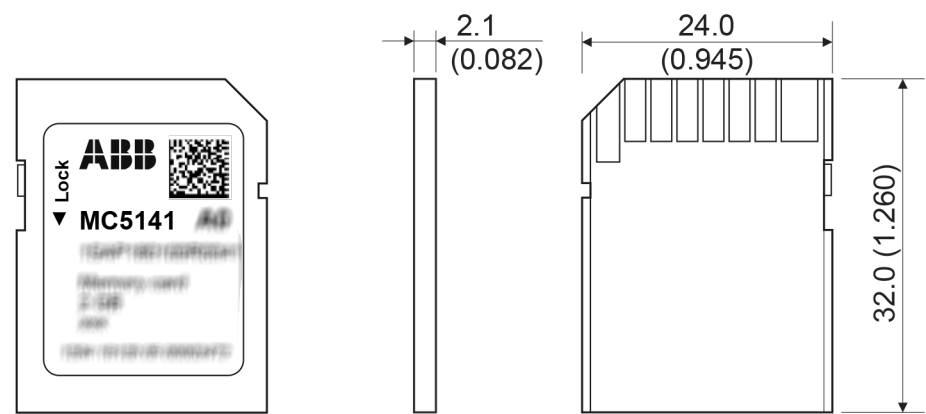

The dimensions are in mm and in brackets in inch.

3 Technical data

Parameter		Value
Memory capacity		2 GB
Total bytes written (TBW)		On request
Data retention		
	at beginning	10 years at +40 °C
	when number of write processes has been 90 % of lifetime of each cell	1 year at +40 °C
Write protect switch		Yes, at the edge of the memory card
Weight		2 g
Dimensions		24 mm x 32 mm x 2.1 mm



It is not possible to use 100 % of a device's memory space. About 10 % of the total available space must remain unused at any time to maintain normal device operation.

