


NSR Series

Threaded Cord Grip

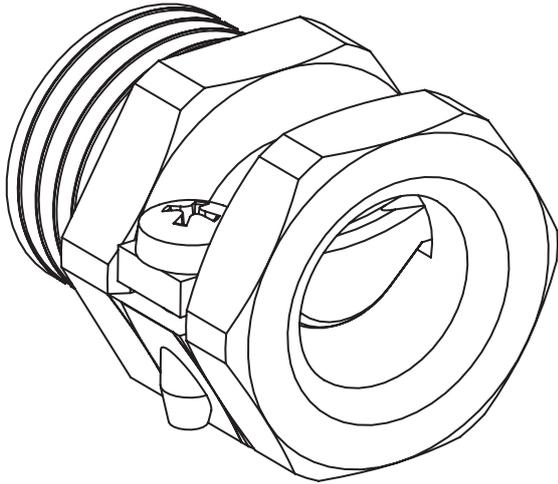

Provides mechanical retention for cables entering enclosures. Reversible clamping bar for maximum cable range.

Features & Benefits:

- Excellent pull-out strength
- Robust construction with screw down clamping bar
- Quick and easy installation
- provides excellent mechanical retention of cables

Applications:

- Suitable for indoor use
- for use with trailing cables from enclosures or as added security for cable retention

Material:

- Halogen free nylon (PA6) construction
- Galvanised steel screws
- Available in black

Temperature range:

- Normal use -20 to +90°C (-4 to +194)°F

Ingress protection:

- IP54 - Depending on cable size

Chemical resistance guide:

- Please refer to TDS000081

Compatible with cable types:

- All cable types
- Round and shaped

Comprises

- Cord Grip
- Locknut

Product selection						
Part no:	Thread	Cable Size		A	B(ref)	C
		Min	Max			
Without Locknut						
NSR-M16B	M16x1.5	3.50 (0.138)	11.00 (0.433)	9.00 (0.354)	14.50 (0.570)	19.00 (0.748)
NSR-M20B	M20x1.5	4.00 (0.157)	14.50 (0.570)	12.00 (0.472)	17.50 (0.689)	23.00 (0.905)
NSR-M25B	M25x1.5	8.00 (0.315)	18.00 (0.708)	12.00 (0.472)	17.50 (0.689)	27.00 (1.063)
With Locknut						
NSR-M16B-N	M16x1.5	3.50 (0.138)	11.00 (0.433)	9.00 (0.354)	14.50 (0.570)	19.00 (0.748)
NSR-M20B-N	M20x1.5	4.00 (0.157)	14.50 (0.570)	12.00 (0.472)	17.50 (0.689)	23.00 (0.905)
NSR-M25B-N	M25x1.5	8.00 (0.315)	18.00 (0.708)	12.00 (0.472)	17.50 (0.689)	27.00 (1.063)

Colour: Black as standard

