

Nexus®Pro

Gateway



Features

- IoT Gateway designed to deliver Bluetooth® Mesh connectivity
- Gateway can be connected wired or wirelessly to WiFi Routers

Mounting

- Gateway supplied with a Din-rail that can also be used for wall installation

Electronics

- Communicates with up to 200 emergency units
- Supplied with a 24 VDC output
- Supports WiFi connections on both 2.4 GHz and 5 GHz frequency bands for added flexibility

Approvals


- Suitable for installation indoors in a secure location 32°F to 104°F
- ROHS compliant

Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 178 or online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

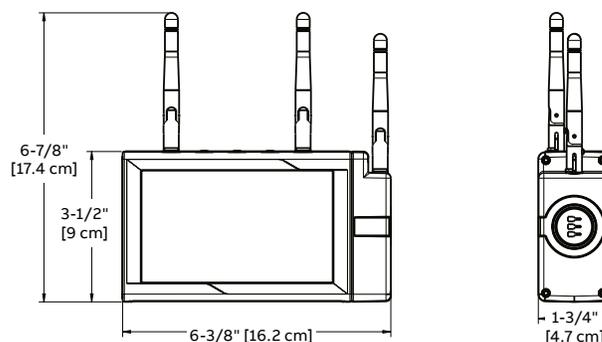

Weight

Catalog number	Weight
NEXP-GATEWAY-EL	1 lb

Power consumption

Catalog number	Power consumption
NEXP-GATEWAY-EL	4W typical, 15W maximum

Ordering information

Catalog number	Description
NEXP-GATEWAY-EL	Nexus®Pro IoT Gateway