

LOW VOLTAGE AC DRIVES

ABB industrial drives for HVACR

ACS880 ultra-low harmonic drives, 55 to 3200 kW



ACS880-37 ultra-low harmonic drives offer an easy harmonic reduction method which is incorporated in the drive. No additional filters or special transformers are needed. This compact, cost-effective solution ensures smooth, energy-efficient operation of your HVACR systems in normal and mission-critical situations.

Keeps the network clean

Clean supply network

The drive produces exceptionally low harmonic content and exceeds the requirements of harmonic recommendations, such as IEEE 519 and G5/4. The total harmonic current distortion is typically <3% in nominal situation and undistorted network.

Scalable functionality


ACS880-37 drives offer a complete HVAC functionality for controlling fans, pumps and compressors as well as complex equipment like air-handling units and chillers. All this comes with a great scalability in terms of power range, ingress protection, construction and harmonics performance.

Reliability and quality

Product features, such as coated boards, earth fault protection, undervoltage or overcurrent control, ensure process reliability. Every drive is factory-tested, verifying its performance and all protective functions. The drive also offers immunity to network disturbances.

Maximized motor performance and efficiency

ABB's direct torque control (DTC) provides precise speed and torque control for maximum motor performance and efficiency. The drive's voltage boost capability also improves motor efficiency – with a higher voltage, the same power is achieved with less current.

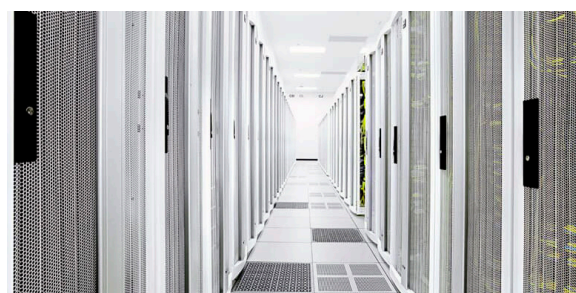

Technical data

ACS880-37 cabinet-built ultra-low harmonic drives


Power range	45 to 3200 kW
Voltage range	3-phase, 380 to 690 V
Enclosure	IP22 (as standard), IP42 and IP54 for different environments, with option for air intake through bottom of the cabinet and channeled air outlet on the top of the cabinet
Frequency	50/60 Hz $\pm 5\%$
Power factor	$\cos \varphi 1$ (fundamental)
Ambient conditions	0 to +40 °C as standard +40 to +50 °C with derating of 1%/1 °C
Efficiency	97%

Main optional built-in features

Cabling	Solutions for bottom and top entry and exit
TÜV certified functional safety	STO (as standard) Optional SS1-t, SS1-r, SLS, SBC, SMS, SSE, POUS, SDI, SSM,
Filters	Du/dt, common mode and sine filters
EMC	According to EN 61800-3: 2004 + A1: 2012. Category C3 and C2 with internal option or as standard.
ATEX	ATEX-certified safe disconnection function, thermistor and PT100 protection functions, Ex II (2) GD

Connectivity

Bluetooth	Bluetooth panel
Communication protocols	DeviceNet™, PROFIBUS, CANopen®, Modbus, ControlNet, EtherCAT®, POWERLINK, Modbus/TCP, PROFINET, EtherNet/IP, PROFIsafe
Remote monitoring	Wired monitoring with NETA-21
PC tools	Drive Composer entry & pro Drive Application builder

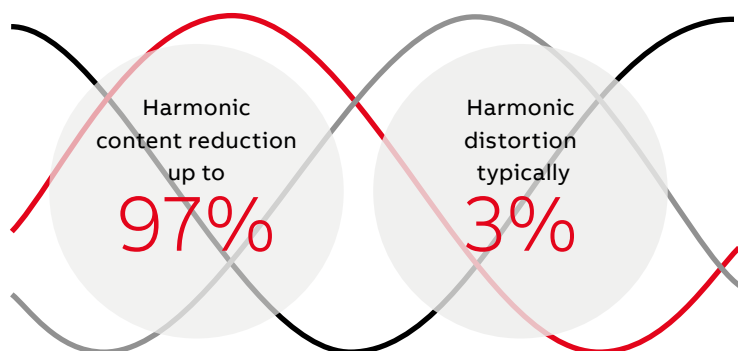

Key features

All-in-one concept

ACS880 ultra-low harmonic (ULH) drives have a built-in active front end reducing THDi to a level below 3%, so there is no need for external filters, which increase installation complexity and space.

Saving capital and operating costs

ACS880 ULH greatly reduces the cost of a project eliminating the need for oversized transformers, generators, cables and other equipment. Power factor unity helps to avoid penalties for reactive power from utilities.

Easy commissioning

No need to set extra parameters for the active supply unit.

Low harmonic content

Total harmonic current distortion is typically <3% in nominal situation and undistorted network.

Unity power factor

Possibility also for network power factor correction.

Voltage boost

Guarantees full motor voltage in all conditions and can also be utilized to overcome a voltage drop caused by long supply or motor cables or output filters. Voltage boost capability may allow a smaller motor to be used.

Nine-year maintenance interval

Factory-tested solution for high reliability

All ACS880 drives are tested at maximum temperature with nominal loads.

For more information please contact your local ABB representative or visit:

www.abb.com/drives

www.abb.com/drivespartners

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB. Copyright© 2021 ABB. All rights reserved.