


		Suojajohdin		MK 6 kevi

Laji	RYHMÄKESKUS		
Tyyppi	RP4E14JUMV		
Sähkö nro	3405663		
$I_{nA}= 40A$	$U_n = 400V$		
$P_n =$	$P_n =$		
Kotelointi	IP65	Valm.vuosi	

The diagram illustrates a power distribution system. On the left, a vertical main busbar is shown with a ground symbol at the top. A circuit breaker labeled QO1 is connected to the busbar. Below QO1, three lines (L1, L2, L3) branch out, each with a switch symbol. Further down, two residual current devices (Irsd) are shown. The first Irsd has a neutral line (N) and a line (L1) connected to it. The second Irsd has a neutral line (N) and three lines (L1, L2, L3) connected to it. At the bottom, a neutral line (N) and a three-phase line (3N) are shown.

[illegible]

KESKUKSEN MITAT	
Leveys :	320 mm
Korkeus:	600 mm
Syvyys :	155 mm

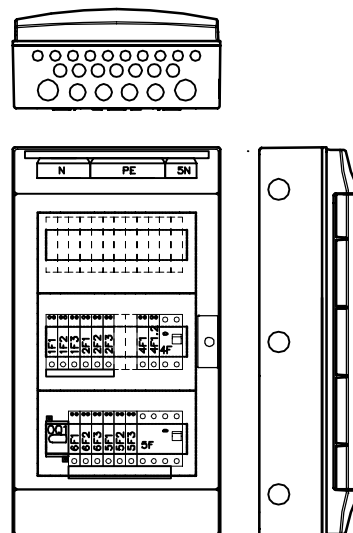

Työ nro		Ark. koodi			RP4E14JUMV-A		KESKUS	RK 1	Työpiir:		
Pvm. 18.05.2015		Suunn. PP	Tark. VN	Hyv. ABB			PÄÄKAAVIO	KOKOONPANOPIIRUSTUS	Loppupiir.		
							Rakennuskohde				
							Tall.koodi 3405663-K				
							Lehti 01 Lehdestä 01				
							Piirustus nro				