

TECHNICAL DATA SHEET

DS0124 rev 34

Cylon® CBXi Series



DESCRIPTION

The **CBXi Series** is a freely programmable range of BACnet® Controllers with native BACnet/IP communications support. The controllers are BTL listed BACnet Building Controller (B-BC) and are ideally suited for a wide range of applications for intelligent control of HVAC equipment, and electrical systems including lighting control and metering applications. The **CBXi-8R8** and **CBXi-8R8-H** controllers support multi-protocol communications simultaneously including BACnet/IP, BACnet MS/TP, Modbus® TCP and Modbus RTU.

Part of Cylon's **CB Line** of BACnet field controllers, the **CBXi-8R8** controller features 8 UniPuts™ with Relay, 8 Universal Inputs, as well as support for up to five FLX (Field Level eXpansion) series extension modules providing up to 96 points of control, and a dedicated input for Cylon's **CBT-STAT** or **UCU Room Display** intelligent room sensors. The **-H** variant provides local override function through HOA switches. **FLX** I/O expansion modules are available in a variety of options to allow maximum flexibility in achieving the required point configuration.

APPLICATION

The **CBXi Series** is designed for a wide range of energy management applications for intelligent control of:

- HVAC equipment such as Central Plant, Boilers, Chillers, Cooling Towers, Pump Systems, Air Handling Units (Constant Volume, Variable Air Volume and Multi-zone), and Rooftop Units,
- Electrical systems such as lighting control, variable frequency drives and metering.

The **CBXi Series** can be used as an integration platform and natively supports the routing of either BACnet MS/TP to BACnet/IP or Modbus RTU to Modbus TCP without the need for gateways or additional hardware.

The controller accommodates available pre-engineered strategies or can be tailored to custom applications using **CXpro^{HD}** programming software.

CBXi-8R8

8 UniPuts + Relays

Hardware connections that can be used as inputs, outputs or relays (software selectable)

8 Universal Inputs

(supports a variety of thermistors and RTDs that range from 0 to 450 kΩ)

CBXi-8R8-H

Additionally includes Hand/Off/Auto Local Override Function

Flexible onboard UniPut technology

allows expandable I/O configurations from 16 to 96 points through connected FLX modules

BACnet/IP communications

with dual port Ethernet switch (star or daisy chain topology) and support for both DHCP and Static IP

Network Time Protocol (NTP) support

Multi-protocol communications support

for BACnet MS/TP, Modbus TCP, Modbus RTU, HTTP, HTTPS and SSH

Cylon Intelligent Room Sensor support

LED status on all I/O channels

provides indication of fault or override status

Compact form factor

to maximize enclosure space requirement

Uses FLX I/O expansion Modules

Interchangeable with the CBX Series BACnet MS/TP controllers

Accessories

Field Level eXpansion (FLX) I/O Modules (-H variants include Hand/Off/Auto Local Override Function)

FLX-4R4(-H) 4 UniPuts with Relay, 4 Universal Inputs

FLX-8R8(-H) 8 UniPuts with Relay, 8 Universal Inputs

FLX-16DI 16 Digital Inputs

FLX-PS24 Power Supply Module

FLX-RMC Remote Module Connector

PRODUCT SELECTION CHART

		CBXi-8R8	CBXi-8R8-H	FLX-4R4	FLX-4R4-H	FLX-8R8	FLX-8R8-H	FLX-16DI
Service		Main Controller	Main Controller	Expansion Module				
I/O Point Qty	UniPuts with Relay ⁽¹⁾	8	8	4	4	8	8	0
	Universal Inputs	8	8	4	4	8	8	0
	Digital Inputs	0	0	0	0	0	0	16
Input Options	Voltage 0 ... 10 V @ 40 kΩ	✓	✓	✓	✓	✓	✓	
	Resistance 0 ... 450 kΩ	✓	✓	✓	✓	✓	✓	
	Temperature -40 °C ... +110 °C (-40 °F ... +230 °F)	✓	✓	✓	✓	✓	✓	
	Current 0 ... 20 mA @ 390 Ω	✓	✓	✓	✓	✓	✓	
	Digital Volt-Free contact	✓	✓	✓	✓	✓	✓	✓
	Digital 24 V AC detect	UniPuts only	UniPuts only	UniPuts only	UniPuts only	UniPuts only	UniPuts only	
	Pulse counting	✓	✓	✓	✓	✓	✓	✓
Output Options	Analog 0 ... 10 V	✓	✓	✓	✓	✓	✓	
	Digital 0 ... 10 V	✓	✓	✓	✓	✓	✓	
	Relay Contacts 24 V AC	✓	✓	✓	✓	✓	✓	
HOA Switch & Pot.			✓		✓		✓	
18 V Aux Power		✓	✓	✓	✓	✓	✓	✓
BACnet MS/TP-to-IP Routing		✓	✓					
Modbus TCP⁽²⁾		✓	✓					
RS-485 Port⁽³⁾		BACnet MS/TP or Modbus RTU	BACnet MS/TP or Modbus RTU					
CBT-STAT Bus (UCU Room Display)		✓	✓					

Note (1) : UniPuts are software configurable for point types AI, DI, AO or DO-R.

Note (2) : CBXi supports a maximum of 320 Modbus points.

Note (3) : RS-485 Port 1 supports one communication protocol at a time.
When configured for BACnet MS/TP-to-IP routing, up to a maximum of 24 connected BACnet MS/TP devices are recommended.
When configured for Modbus RTU, a maximum of 320 points that can be a combination of Modbus RTU or TCP may be connected.

Note: CBXi acts only as a Modbus Client for Modbus TCP communications, and only as a Modbus Master for Modbus RTU communications.

SPECIFICATIONS

MECHANICAL

Size (excluding terminal plugs)	166 x 89.5 x 57 mm [6.5 x 3.55 x 2.25"]
Enclosure	Flame-Retardant ABS DIN 43880 type-2 compatible Enclosure IP 20
Mounting	DIN rail

CONNECTION

Note: Use Copper or Copper Clad Aluminum 70 °C (158 °F) conductors only.

Terminals	PCB mounted plug terminal connections
Conductor Area	Max: AWG 12 (3.31 mm ²) Min: AWG 22 (0.355 mm ²)

ENVIRONMENT

Note: This equipment is intended for field installation within an enclosure.

Ambient Temperature	-25 °C ... 50 °C (-13 °F ... 122 °F)
Ambient Humidity	0% ... 90% RH non-condensing
Storage Temperature	-30 °C ... +70 °C (-22 °F ... 158 °F)
EMC Immunity	EN 61326-1: 2013
EMC Emission	EN 61326-1: 2013 EN 61000-3-2: 2014 EN 61000-3-3: 2013
Approvals	UL Listed (CDN & US) UL916 Energy Management Equipment – File No. E176435
Safety	CE Approved

ELECTRICAL

Supply Requirements	24 V AC/DC ±20 % 50/60 Hz
Supply	CBXi 30 VA (no FLX modules)
Rating	CBXi + 1 x FLX 42 VA CBXi + 2 x FLX 54 VA CBXi + 3 x FLX 66 VA
FLX Power Connection	Proprietary FLX bus connector carries power and communications from CBXi unit to power to up to 3 FLX modules. Using the FLX-PS24 allows up to a total of 5 FLX modules.
Auxiliary Power	18 V DC / 60 mA output

PROCESSOR

Type	TI Sitara AM335X Dual-core ARM Cortex A8
Clock Speed	600 MHz
System Memory	4 GB eMMC Flash + 512 MB DDR3 DRAM
Real-Time Clock	Yes, backed for 7 days typical

COMMUNICATIONS

Ethernet ports	Dual Switched 10/100BASE-TX (RJ45) Addressing: IPv4, IPv6 or Hostname / DHCP Client or Static IP Connection Topology: Daisy-chain BACnet/IP, BTL-BBC
Local serial port	USB Micro-B socket
USB ports	2 x Type-A USB connectors USB 2.0 5 V DC 2.5W
RS485 Port 1	Software selectable BACnet MS/TP or Modbus RTU RS485 @ 9K6, 19K2, 38K4 (default), 57K6, 76K8 or 115k2 Baud. Max cable length 1.2 km @ default ¼ unit load device. When configured as Modbus RTU a maximum of 320 points may be connected, which can be a combination of Modbus RTU or TCP
Local STAT Port	RS485 with a maximum cable length 500 m Supports CBT-STAT and UCU Room Display
FLX bus	115.2K Baud Max bus length (including extension cables): 30 m / 100 ft. using 18 AWG conductors 15 m / 50 ft. using 22 AWG conductors
FLX bus Connection	FLX bus connector carries inter-module communications and module power

INPUTS / OUTPUTS

Note: Shielded cable is recommended for all input connections.

UniPuts™ with Relay



When configured as Input:

Analogue Input	Range: 0 ... 10 V @ 40 kΩ Accuracy: ±0.5% full scale [50mV]
Resistance measurement	Range: 0 ... 450 kΩ Accuracy: ±0.5% of measured resistance
Temperature measurement	Range: -40 °C ... +110 °C (-40 °F ... +230 °F) Accuracy: 10k NTC sensors (e.g. 10k Type 2 (10K3A1) or 10k Type 3 (10K4A1)) ±0.3 °C, -40 to 90 °C (-40 °F to 194 °F); ±0.4 °C > 90 °C (194 °F)
Current input	Range: 0 ... 20 mA @ 390 Ω

Note: Current Input requires user-supplied external 390 Ω resistance.

Accuracy: depends on user supplied external resistor
Digital Volt-Free contact, 2 mA contact-wetting current
Digital 24 V AC detect
Pulse counting up to 20 Hz, 25 ms - 25 ms

When configured as Output:

Analogue Output 0 ... 10 V @ 20 mA max load, 12-bit resolution
Digital Output 0 ... 10 V @ 20 mA max load
Relay Contacts with ability to switch up to 24 V AC
Maximum Load: 24 V AC, 2 (1) A resistive (inductive) for all relay contacts

Universal Inputs



Analogue Input	Range: 0 ... 10 V @ 130 kΩ Accuracy: ±0.5% full scale [50mV]
Resistance measurement	Range: 0 ... 450 kΩ Accuracy: ±0.5% of measured resistance
Temperature measurement	Range: -40 °C ... +110 °C (-40 °F ... +230 °F) Accuracy: 10k NTC sensors (e.g. 10k Type 2 (10K3A1) or 10k Type 3 (10K4A1)) ±0.3 °C, -40 to 90 °C (-40 °F to 194 °F); ±0.4 °C > 90 °C (194 °F)
Current input	Range: 0 ... 20 mA @ 390 Ω Accuracy: ±0.5% full scale [100µA]
Digital Volt-Free contact, 2 mA contact-wetting current	
Pulse counting up to 20 Hz, 25 ms – 25 ms	

Notes: 1) All inputs and outputs are protected against short circuit, as well as over-voltage up to 24 V AC.
2) Inputs use on-board 16-bit analog to digital convertor.
3) 18 V DC supply, max 60 mA per CBXi unit, is available for powering sensors.

SOFTWARE FEATURES

Maximum number of Strategy Modules	2000
Maximum number of Trendlog Modules	144
Entries per Trendlog	1024
Maximum BACnet Schedules	16
Exceptions per Schedule	5
Maximum number of Exposable BACnet Points	960
Data Security	Strategy and Set points backed up in Flash

INTERFACE

Engineering Software

CXpro™




Touchscreen

eXplore



DIMENSIONS

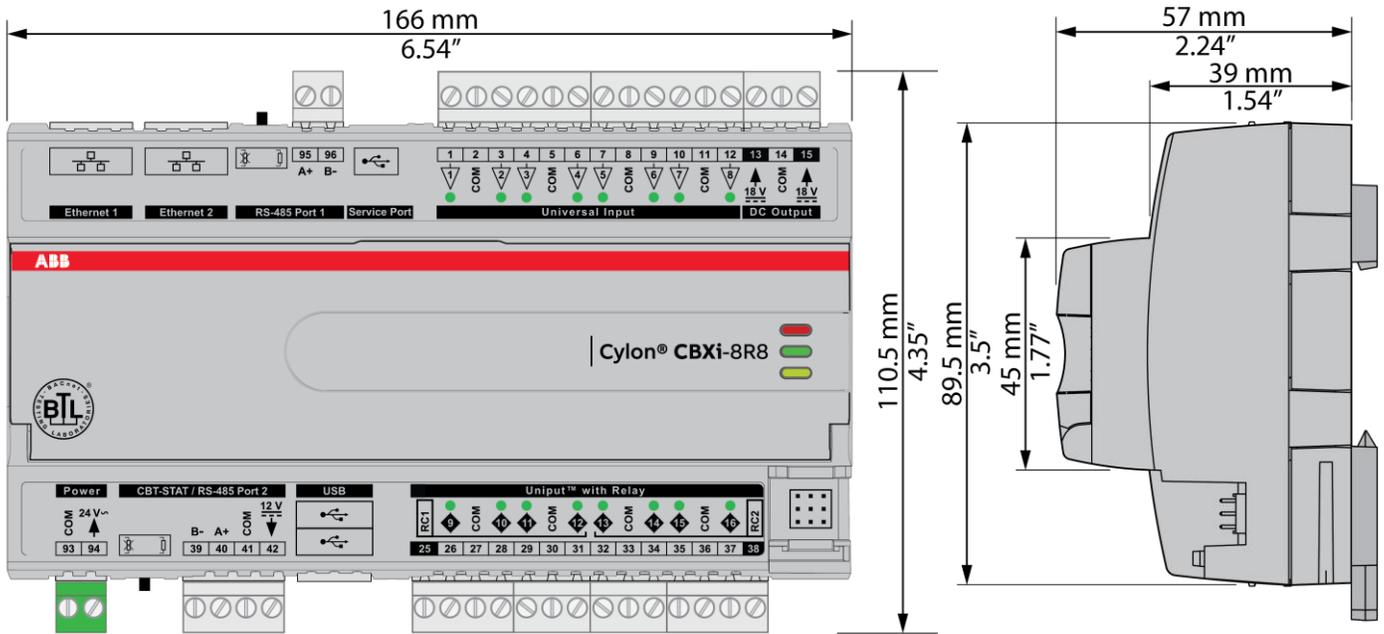

SYSTEM ARCHITECTURE

