

5SNA 1800E330400

HiPak IGBT module



- Ultra low loss TSPT+ technology
- Very soft switching FCE diode with increased diode area
- Exceptional ruggedness and highest current rating
- AlSiC base-plate for high power cycling capability
- AlN substrate for low thermal resistance

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	min	max	Unit
Collector-emitter voltage	V_{CES}	$V_{GE} = 0 \text{ V}, T_{vj} \geq 25 \text{ }^{\circ}\text{C}$		3300	V
		$V_{GE} = 0 \text{ V}, T_{vj} = -40 \text{ }^{\circ}\text{C}$		3000	
DC collector current	I_C	$T_C = 98 \text{ }^{\circ}\text{C}, T_{vj} = 150 \text{ }^{\circ}\text{C}$		1800	A
Peak collector current	I_{CM}	$t_p = 1 \text{ ms}$		3600	A
Gate-emitter voltage	V_{GES}		-20	20	V
DC forward current	I_F			1800	A
Peak forward current	I_{FRM}	$t_p = 1 \text{ ms}$		3600	A
Surge current	I_{FSM}	$V_R = 0 \text{ V}, T_{vj \text{ start}} = 150 \text{ }^{\circ}\text{C},$ $t_p = 10 \text{ ms, half-sinewave}$		14300	A
IGBT short circuit SOA	t_{psc}	$V_{CC} = 2500 \text{ V}, V_{CEM \text{ CHIP}} \leq <:V_{BRCES_25_min}> \text{ V}$ $V_{GE} \leq 15 \text{ V}, T_{vj \text{ start}} \leq 150 \text{ }^{\circ}\text{C}$		10	μs
Isolation voltage	V_{isol}	1 min, $f = 50 \text{ Hz}$		6000	V
Junction temperature	T_{vj}			175	$^{\circ}\text{C}$
Junction operating temperature	$T_{vj(op)}$		-40	150	$^{\circ}\text{C}$
Case temperature	T_C		-40	125	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-50	125	$^{\circ}\text{C}$
Mounting torques ²⁾	M_s	Base-heatsink, M6 screws	4	6	Nm
	M_{t1}	Main terminals, M8 screws	8	10	
	M_{t2}	Auxiliary terminals, M3 screws	2	3	

¹⁾ Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747

²⁾ For detailed mounting instructions refer to ABB Document No. 5SYA 2039

IGBT characteristic values ³⁾

Parameter	Symbol	Conditions	min	typ	max	Unit	
Collector (-emitter) breakdown voltage	$V_{(BR)CES}$	$V_{GE} = 0 \text{ V}$, $I_C = 10 \text{ mA}$	$T_{vj} = 150 \text{ }^{\circ}\text{C}$	3300		V	
			$T_{vj} = 25 \text{ }^{\circ}\text{C}$	3300			
			$T_{vj} = -40 \text{ }^{\circ}\text{C}$	3000			
Collector-emitter ⁴⁾ saturation voltage	$V_{CE \text{ sat}}$	$I_C = 1800 \text{ A}$, $V_{GE} = 15 \text{ V}$	$T_{vj} = 25 \text{ }^{\circ}\text{C}$		2.3	2.7	V
			$T_{vj} = 125 \text{ }^{\circ}\text{C}$		2.75	3.2	
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		2.9		
Collector cut-off current	I_{CES}	$V_{CE} = 3300 \text{ V}$, $V_{GE} = 0 \text{ V}$	$T_{vj} = 25 \text{ }^{\circ}\text{C}$			1	mA
			$T_{vj} = 125 \text{ }^{\circ}\text{C}$		22		
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		120		
Gate leakage current	I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$, $T_{vj} = 125 \text{ }^{\circ}\text{C}$	-500		500	nA	
Gate-emitter threshold voltage	$V_{GE(To)}$	$I_C = 240 \text{ mA}$, $V_{CE} = V_{GE}$, $T_{vj} = 25 \text{ }^{\circ}\text{C}$	6.7		8.7	V	
Gate charge	Q_{ge}	$I_C = 1800 \text{ A}$, $V_{CE} = 1800 \text{ V}$, $V_{GE} = -15 \text{ V} \dots 15 \text{ V}$		18		μC	
Input capacitance	C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$, $T_{vj} = 25 \text{ }^{\circ}\text{C}$		239		nF	
Internal gate resistance	R_{Gint}			0.83		Ω	
Turn-on delay time	$t_{d(on)}$	$V_{CC} = 1800 \text{ V}$, $I_C = 1800 \text{ A}$, $R_G = 1.2 \text{ }\Omega$, $C_{GE} = 330 \text{ nF}$, $V_{GE} = \pm 15 \text{ V}$, $L_{\sigma} = 100 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ }^{\circ}\text{C}$		1120	ns	
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		1120		
Rise time	t_r		$T_{vj} = 25 \text{ }^{\circ}\text{C}$		310	ns	
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		320		
Turn-off delay time	$t_{d(off)}$		$T_{vj} = 25 \text{ }^{\circ}\text{C}$		2890	ns	
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		3470		
Fall time	t_f		$T_{vj} = 25 \text{ }^{\circ}\text{C}$		350	ns	
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		420		
Turn-on switching energy	E_{on}		$V_{CC} = 1800 \text{ V}$, $I_C = 1800 \text{ A}$, $R_G = 1.2 \text{ }\Omega$, $C_{GE} = 330 \text{ nF}$, $V_{GE} = \pm 15 \text{ V}$, $L_{\sigma} = 100 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ }^{\circ}\text{C}$		3300	mJ
			$T_{vj} = 125 \text{ }^{\circ}\text{C}$		4100		
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		4300		
Turn-off switching energy	E_{off}		$V_{CC} = 1800 \text{ V}$, $I_C = 1800 \text{ A}$, $R_G = 4.7 \text{ }\Omega$, $C_{GE} = 330 \text{ nF}$, $V_{GE} = \pm 15 \text{ V}$, $L_{\sigma} = 100 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ }^{\circ}\text{C}$		3100	mJ
			$T_{vj} = 125 \text{ }^{\circ}\text{C}$		4100		
			$T_{vj} = 150 \text{ }^{\circ}\text{C}$		4400		
Short circuit current	I_{SC}	$V_{CC} = 2500 \text{ V}$, $V_{GE} = 15 \text{ V}$	$T_{vj \text{ start}} = 150 \text{ }^{\circ}\text{C}$		6600	A	

³⁾ Characteristic values according to IEC 60747 – 9⁴⁾ Collector-emitter saturation voltage is given at chip level

Diode characteristic values ⁵⁾

Parameter	Symbol	Conditions		min	typ	max	Unit
Forward voltage ⁶⁾	V _F	I _F = 1800 A	T _{vj} = 25 °C		2.0	2.45	V
			T _{vj} = 125 °C		2.2	2.65	
			T _{vj} = 150 °C		2.15		
Peak reverse recovery current	I _{RM}	V _{CC} = 1800 V, I _F = 1800 A, V _{GE} = ±15 V, R _G = 1.2 Ω, C _{GE} = 330 nF, di / dt = 6.7 kA / μs, L _σ = 100 nH, inductive load	T _{vj} = 25 °C		2340		A
			T _{vj} = 125 °C		2750		
			T _{vj} = 150 °C		3010		
Recovered charge	Q _{rr}		T _{vj} = 25 °C		1260		μC
			T _{vj} = 125 °C		2060		
			T _{vj} = 150 °C		2400		
Reverse recovery time	t _{rr}		T _{vj} = 25 °C		850		ns
			T _{vj} = 125 °C		1080		
			T _{vj} = 150 °C		1220		
Reverse recovery energy	E _{rec}		T _{vj} = 25 °C		1400		mJ
			T _{vj} = 125 °C		2290		
			T _{vj} = 150 °C		2570		

⁵⁾ Characteristic values according to IEC 60747 – 2⁶⁾ Forward voltage is given at chip levelPackage properties ⁷⁾


Parameter	Symbol	Conditions	min	typ	max	Unit
IGBT thermal resistance junction to case	$R_{th(j-c)IGBT}$				0.009	K/W
Diode thermal resistance junction to case	$R_{th(j-c)DIODE}$				0.014	K/W
IGBT thermal resistance ²⁾ case to heatsink	$R_{th(c-s)IGBT}$	IGBT per switch, λ grease = $1\text{W}/\text{m} \times \text{K}$		0.007		K/W
Diode thermal resistance ²⁾ case to heatsink	$R_{th(c-s)DIODE}$	Diode per switch, λ grease = $1\text{W}/\text{m} \times \text{K}$		0.010		K/W
Partial discharge extinction voltage	V_e	$f = 50 \text{ Hz}, Q_{PD} \leq 10 \text{ pC}$ (acc. To IEC 61287)	2600			V
Comparative tracking index	CTI		600			
Module stray inductance	$L_{\sigma CE}$			8		nH
Resistance, terminal-chip	$R_{CC+EE'}$	$T_C = 25 \text{ }^{\circ}\text{C}$		0.055		m Ω
		$T_C = 125 \text{ }^{\circ}\text{C}$		0.075		
		$T_C = 150 \text{ }^{\circ}\text{C}$		0.080		

²⁾ For detailed mounting instructions refer to ABB Document No. 5SYA 2039Mechanical properties ⁷⁾


Parameter	Symbol	Conditions	min	typ	max	Unit
Dimensions	L x W x H	Typical		190 x 140 x 38		mm
Clearance distance in air	d_a	according to IEC 60664-1 and EN 50124-1	Term. to base:	23		mm
			Term. to term:	19		
Surface creepage distance	d_s	according to IEC 60664-1 and EN 50124-1	Term. to base:	28.2		mm
			Term. to term:	28.2		
Mass	m			1190		g

⁷⁾ Package and mechanical properties according to IEC 60747 – 15

Electrical configuration

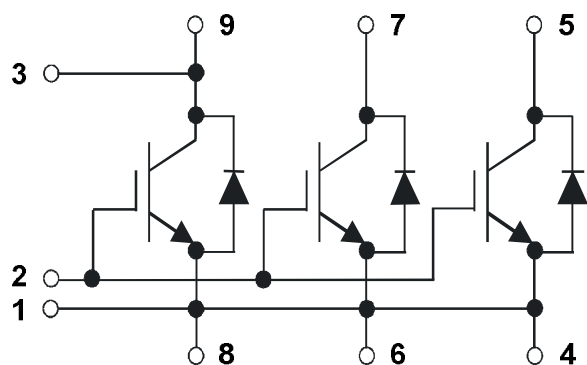

Outline drawing (mm)

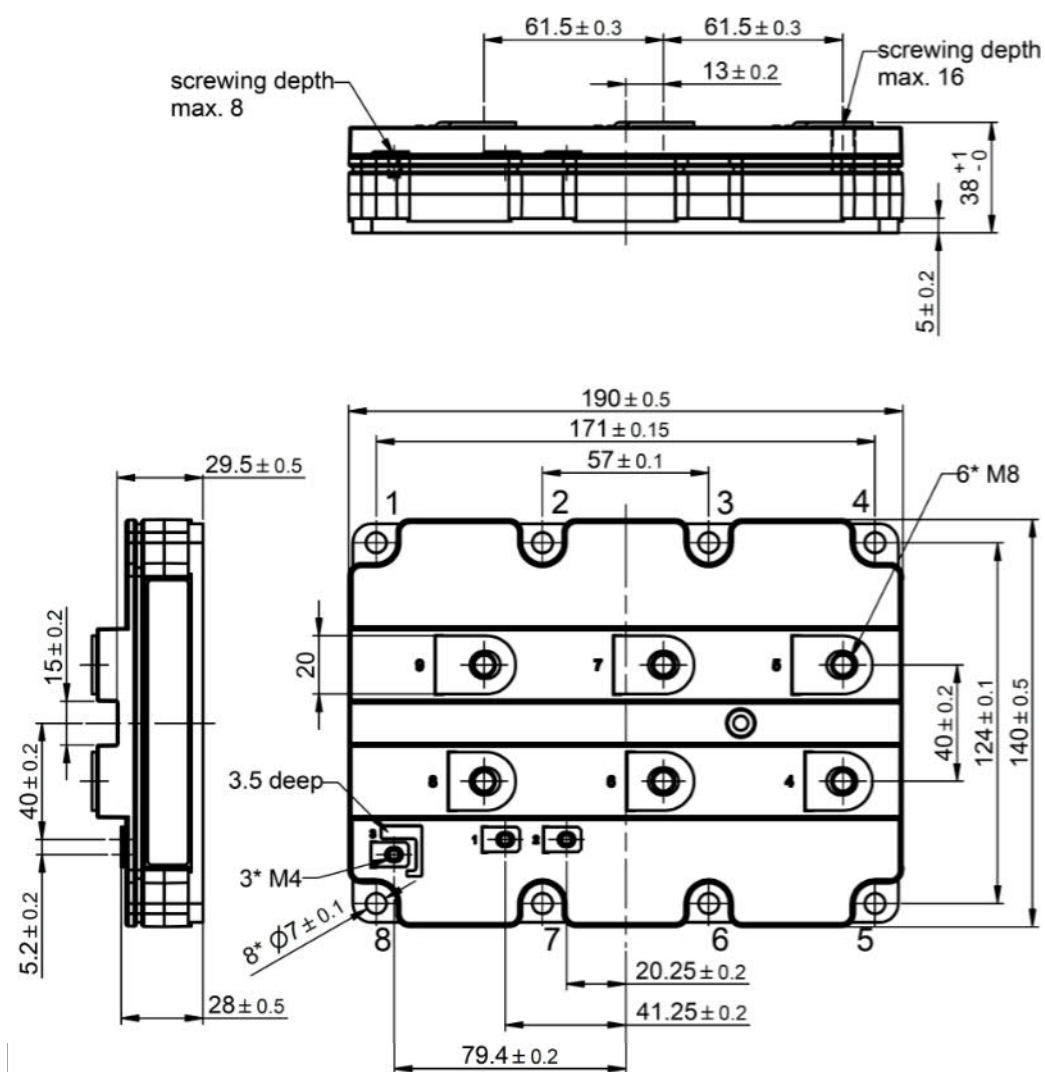

Note: This is an electrostatic sensitive device, please observe the international standard IEC 60747-1, chap. VIII. This product has been designed and qualified for Industrial Level.

Fig. 1 Typical on-state characteristics, chip level

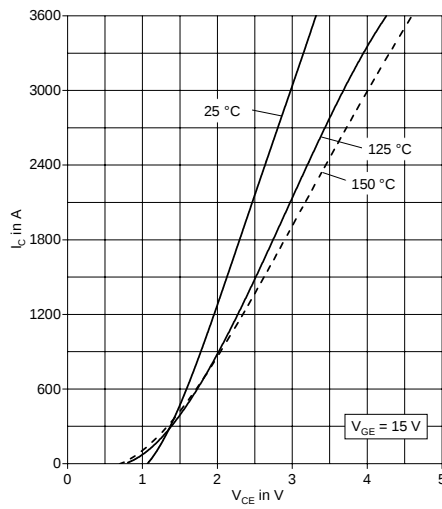


Fig. 2 Typical transfer characteristics, chip level

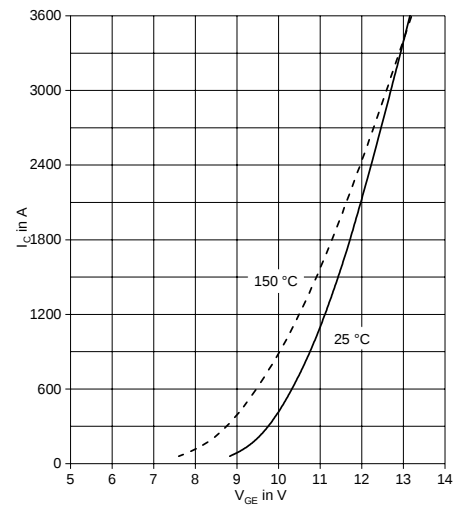


Fig. 3 Typical output characteristics, chip level

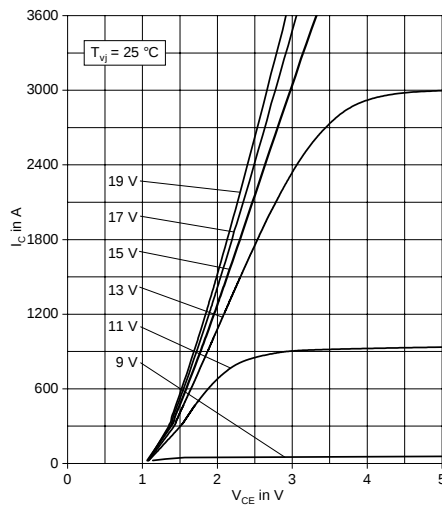


Fig. 4 Typical output characteristics, chip level

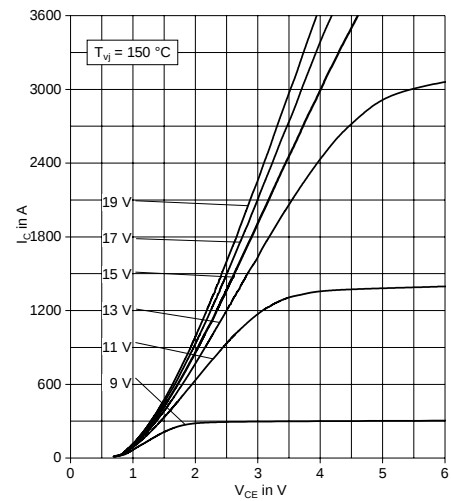


Fig. 5 Typical switching energies per pulse vs. collector current

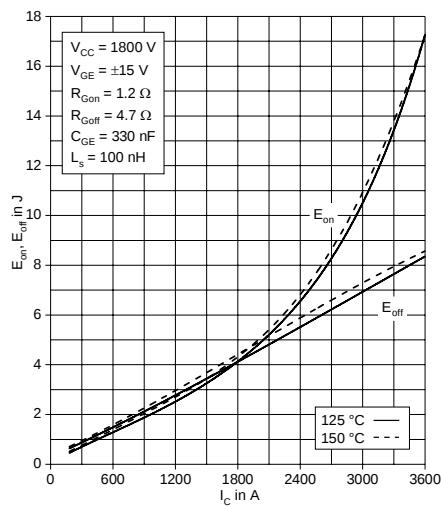


Fig. 6 Typical switching energies per pulse vs. gate resistor

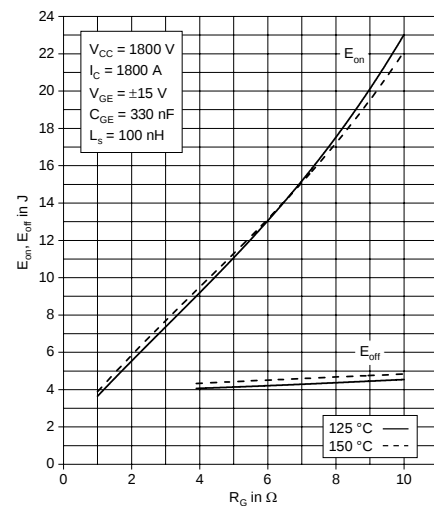


Fig. 7 Typical switching times vs. collector current

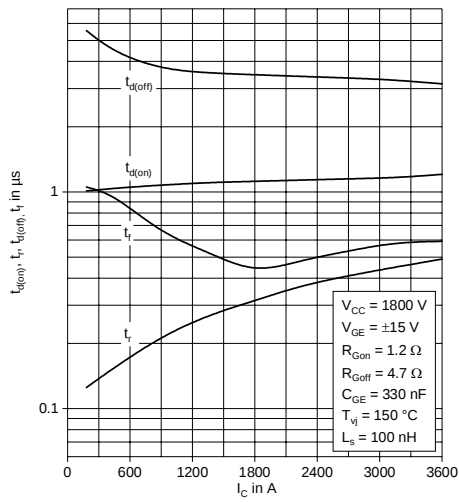


Fig. 8 Typical switching times vs. gate resistor

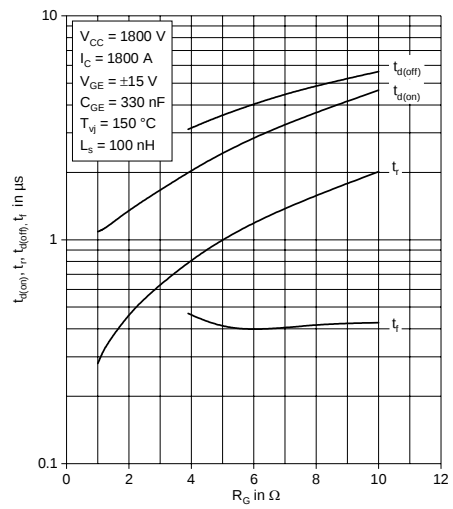


Fig. 9 Typical gate charge characteristics

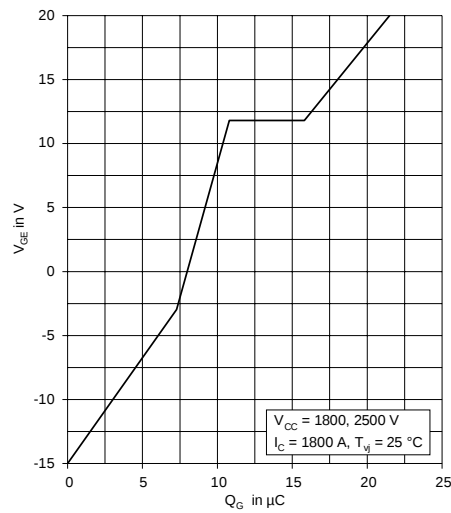


Fig. 10 Turn-off safe operating area (RBSOA)

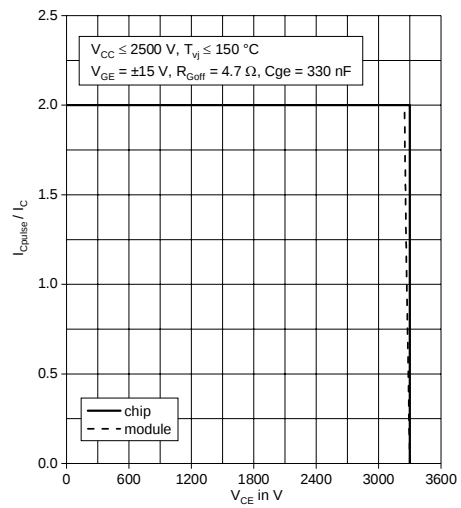


Fig. 11 Typical diode forward characteristics chip level

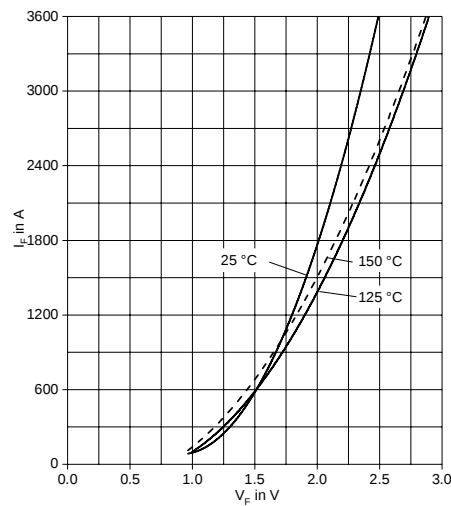


Fig. 12 Typical reverse recovery characteristics vs. forward current

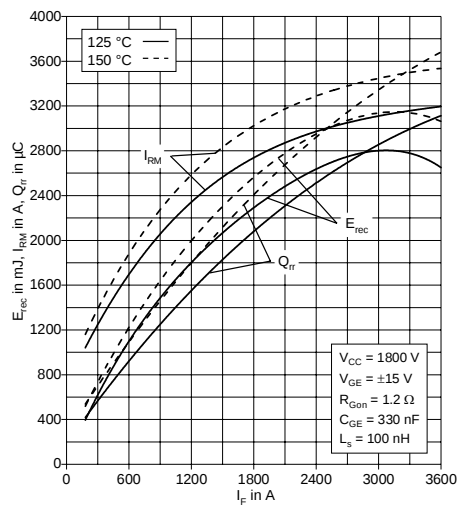


Fig. 13 Typical reverse recovery characteristics vs. di/dt

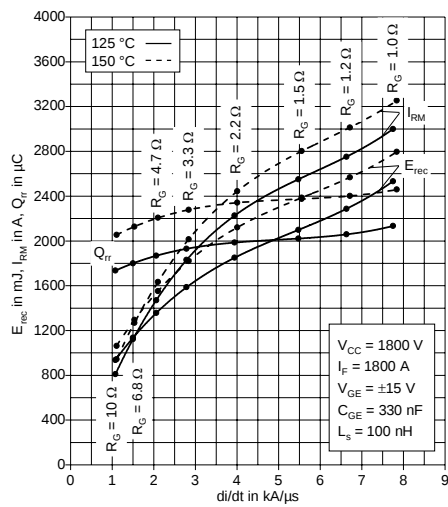


Fig. 14 Safe operating area diode (SOA)


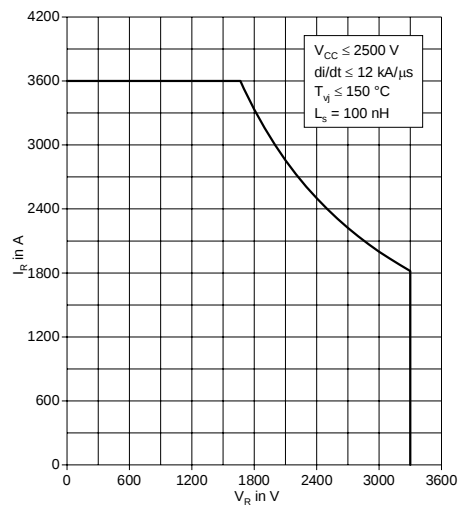


Fig. 15 Thermal impedance vs. time

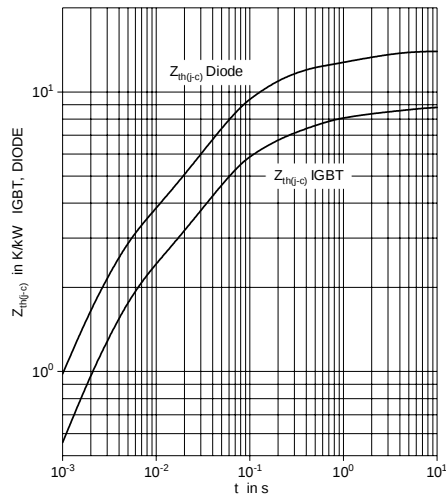

Analytical function of the transient thermal resistance

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i(1 - e^{-t/\tau_i})$$

i	1	2	3	4	5
IGBT	Ri(K/kW)	1.631	4.286	2.089	0.855
	τi(ms)	2.986	48.79	364.8	3593
DIODE	Ri(K/kW)	2.441	4.23	5.055	2.253
	τi(ms)	2.434	36.51	116.2	1641

Related documents:

- 5SYA 2039 Mounting Instructions for HiPak modules
- 5SYA 2042 Failure rates of IGBT modules due to cosmic rays
- 5SYA 2043 Load – cycle capability of HiPaks
- 5SYA 2045 Thermal runaway during blocking
- 5SYA 2053 Applying IGBT
- 5SYA 2057 IGBT diode safe operating area (SOA)
- 5SYA 2058 Surge currents for IGBT diodes
- 5SYA 2093 Thermal design of IGBT modules
- 5SYA 2098 Paralleling of IGBT modules
- 5SZK 9111 Specification of environmental class for HiPak Storage
- 5SZK 9112 Specification of environmental class for HiPak Transportation
- 5SZK 9113 Specification of environmental class for HiPak Operation (Industry)
- 5SZK 9120 Specification of environmental class for HiPak