

# Stanilite®

## Platinum power supply unit remote weatherproof Nexus®

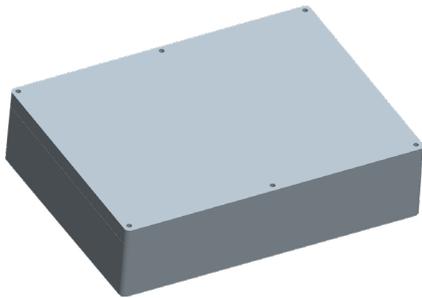


Image indicative only

### Range

Platinum range

### Product group


Power supply unit



### Features

- Used in combination with weatherproof remote exit; exit mounted inside the freezer or coolroom and remote power supply mounted outside up to 10m away from the exit
- Low power consumption for reduced operation and maintenance costs
- IP55 weatherproof enclosure
- Advanced charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- Nexus® monitored, either cabled or wireless
- Chemical resistant UV stabilised polycarbonate enclosure
- Includes 10m interconnection cable
- Weatherproof remote exit available in standard configuration. Refer to separate technical data sheets; PWQFFRLEDP-P, PWEXLEDREM-1P, PWEXLEDREM-2P, PWEXLEDREM-3P

| Catalogue no.         | Description  |
|-----------------------|--|
| <b>Nexus products</b> |  |
| WPPSNXSLED1W6P        | Platinum power supply unit remote weatherproof Nexus LX - for exit LED |
| WPPSNRFLED1W6P        | Platinum power supply unit remote weatherproof Nexus RF - for exit LED |
| <b>Spare parts</b>    |  |
| 03-01301P             | Battery LiFePO4 3.2V 3.2Ah   |

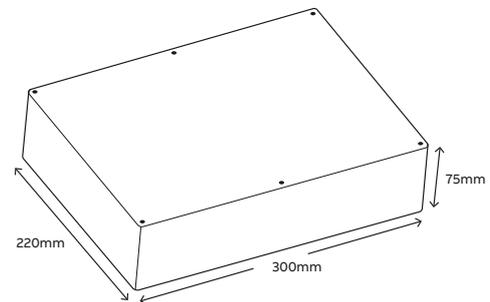

| Dimensions        |                 |                   |        |
|-------------------|-----------------|-------------------|--------|
|                   | Length          | Width             | Height |
|                   | 300mm           | 220mm             | 75mm   |
| Weight            |                 |                   |        |
|                   | Model           | Weight            |        |
|                   | Nexus LX/RF     | 2.0kg             |        |
| Construction      |                 |                   |        |
|                   | Part            | Construction      |        |
|                   | Enclosure cover | Polycarbonate     |        |
| Power consumption |                 |                   |        |
|                   | Model           | Power consumption |        |
|                   | Nexus LX/RF     | 3.2W              |        |

Note:  
 - Designed to comply with AS2293 and meet relevant Australian EMC standards

---

ABB Australia Pty Limited  
Phone: 1800 60 20 20  
E-mail: AU-ABB-Stanilite@abb.com

**[www.stanilite.com.au](http://www.stanilite.com.au)**

---

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB.  
Copyright © 2020 ABB  
All rights reserved