


SPECIFICATION SHEET

## ABB Welcome™

# M2200x-x Audio handset indoor station


M22001-W M22002-W M22003-W





#### **Key features**


- 1 button for easy unlocking, and 2 additional buttons for self-setting functions.
- Max-mid-mute volume adjuster on the side.
- 2 LEDs to indicate different status.
- 5 ringtones.
- Easy to configure lock control.
- Available in 3 or 6 button option. 3 button has an optional induction loop.
- Replaceable handsets.

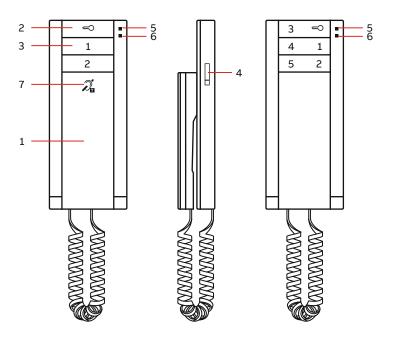

### **Function**

- 1. Handset
- 2. Unlock button
- 3. 2 LEDs to indicate different status.
- 4. Programmable button
- 5. LED (Red)
- 6. LED (Blue)
- 7. \*\*Indution loop function

<sup>\*\*</sup>This function is only available in M22003.

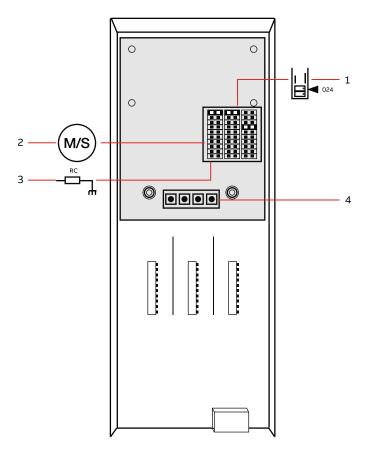

#### **Functions**

- Addressing jumpers X100 X10 X1
- 2. Master/slave function
- 3. Terminal resistor
- 4. Bus connection a,b \_1 Doorbell connection

### **Specifications**

| Operating temperature | 14 °F – 131 °F  |
|-----------------------|---|
| Ingress protection    | IP30  |
| Single-wire clamps    | 2 x 16AWG - 2 x 16AWG   |
| Fine-wire clamps      | 2 x 16AWG - 2 x 16AWG   |
| Bus voltage           | 20-30 VDC (From system controller or system component configured as local power supply) |
| Product dimensions    | 7.80" x 3.19" x 1.69"   |

Electrification Products 860 Ridge Lake Boulevard Memphis, TN 38120 www.abb.com/door-entry-system-us USA Technical Support: 888-862-3289 7:00 a.m. to 5:00 p.m., CST, Monday - Friday eppc.support@us.abb.com