

# Electronic timer CT-EKE

## ON-delayed with 1 thyristor

The CT-EKE is an electronic time relay with ON-delay. It is from the CT-E range.

The CT-E range is the economic range of ABB's time relays and offers a cost effective price-performance ratio for OEM users. This is achieved by simplified functionality and results in the simplest of setup procedures. The CT-E range is ideally suited for repeat applications.



### Characteristics

- 3 versions with 3 different single time ranges: 0.1-10 s, 0.3-30 s and 3-300 s
- Rated control supply voltage range 24-240 V AC/DC
- Single-function ON-delay timer
- 1 Thyristor
- 22.5 mm (0.89 in) width
- 1 LED for the indication of operational states

### Order data

Type	Rated control supply voltage	Time range	Order code
CT-EKE	24-240 V AC/DC	0.1-10 s	1SVR 550 509 R1000
		0.3-30 s	1SVR 550 509 R4000
		3-300 s	1SVR 550 509 R2000

## Functions

### Operating controls



#### 1 Indication of operational states

T: green LED – Load energized

#### 2 Thumbwheel for the fine adjustment of the time delay

### Application

Their conception makes the CT-E range timers ideal for repeat applications.

The devices CT-EKE are solid-state timers with thyristor output for 2-wire applications. They are connected directly in series with the control coil of contactors or relays. Voltage should not be applied without a load connected, because there is no current limiting in the device.

Devices with solid-state output are the perfect solution for high switching frequencies.

### Operating mode


The fine adjustment of the time delay is made via the front-face thumbwheel.

## Function diagram

### ☒ ON-delay (Delay on make)

Timing begins when control supply voltage is applied to terminal A1 and the load connected in series with AL. When the selected time delay is complete, the load energizes. The green LED glows as long as the load is energized.

If control supply voltage is interrupted, the load de-energizes and the time delay is reset. Interrupting control supply voltage before the time delay is complete, resets the time delay. The load does not energize.

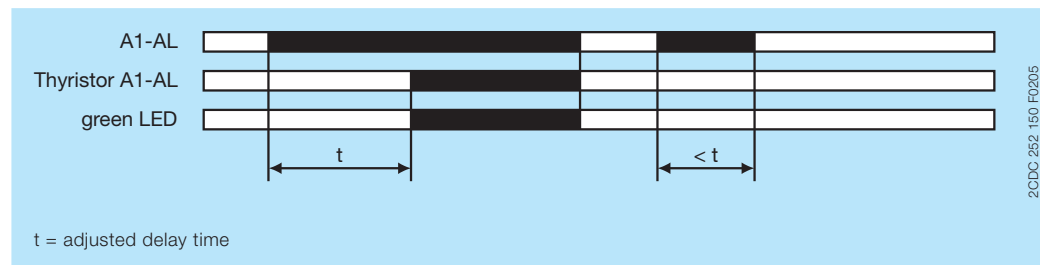

## Electrical connection



Connection diagram

## Technical data


Data at  $T_a = 25\text{ °C}$  and rated values, unless otherwise indicated

### Input circuits

Supply circuit		A1-AL
Rated control supply voltage $U_s$		24-240 V AC/DC
Rated control supply voltage $U_s$ tolerance		-15...+10 %
Rated frequency		50/60 Hz
Typical current / power consumption		approx. 1.0-2.0 VA/W
Voltage drop in connected state		$\leq 3\text{ V}$
Current consumption while timing		$\leq 2\text{ mA}$ (24-60 V AC/DC) $\leq 8\text{ mA}$ (60-240 V AC/DC)
Release voltage		> 10 % of the minimum control supply voltage
Cable length between solid-state timer and connected load at 50 Hz and a cable capacity of 100 pF/m	at 24 V AC	220 m / 22 nF
	at 42 V AC	100 m / 10 nF
	at 60 V AC	65 m / 6.5 nF
	at 110 V AC	50 m / 5 nF
	at 240 V AC	22 m / 2.2 nF

Timing circuit	
Time range	depending on device: 0.1-10 s, 0.3-30 s or 3-300 s
Recovery time	< 50 ms
Repeat accuracy (constant parameters)	$\Delta t < 1\%$
Accuracy within the rated control supply voltage tolerance	$\Delta t < 0.5\% / V$
Accuracy within the temperature range	$\Delta t < 0.1\% / \text{°C}$
Setting accuracy of time delay	$\pm 10\%$ of full-scale value

### User interface

Indication of operational states	
Output	T: green LED  L: load energized

### Output circuit

Kind of output	thyristor
Min. load current	10 mA
Max. load current	0.7 A
Load current reduction / derating	10 mA / °C
Max. surge current	$\leq 15\text{ A}$
Voltage drop in connected state	$\leq 8\text{ V}$
Discharge current with blocked solid-state output	$\leq 4\text{ mA}$

### General data

MTBF		on request
Duty time		100 %
Dimensions		see 'Dimensional drawings'
Weight	net weight	0.050 kg (0.110 lb)
	gross weight	0.061 kg (0.134 lb)
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool
Mounting position		any
Minimum distance to other units		not necessary
Material of housing	lower section	UL 94 V-0
	upper section	UL 94 V-2
Degree of protection	housing	IP50
	terminals	IP20

## Electrical connection

Connecting capacity	fine-strand with wire end ferrule	2 x 0.75-1.5 mm <sup>2</sup> (2 x 18-16 AWG)
	fine-strand without wire end ferrule	2 x 1-1.5 mm <sup>2</sup> (2 x 18-16 AWG)
	rigid	2 x 0.75-1.5 mm <sup>2</sup> (2 x 18-16 AWG)
Stripping length		10 mm (0.39 in)
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)

## Environmental data

Ambient temperature ranges	operation	-20...+60 °C
	storage	-40...+85 °C
Relative humidity range		4 x 24 h cycle, 40 °C, 93 % RH
Vibration, sinusoidal	IEC/EN 60068-2-6	20 m/s <sup>2</sup> , 10-58/60-150 Hz
Shock, half-sine	IEC/EN 60068-2-27	150 m/s <sup>2</sup> , 11 ms, 3 shocks/direction

## Isolation data

Pollution degree (IEC/EN 60664, IEC/EN 60255-5)	3
Overvoltage category (IEC/EN 60664, IEC/EN 60255-5)	III

## Standards / Directives


Standards	IEC/EN 61812-1
Low Voltage Directive	2014/35/EU
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

## Electromagnetic compatibility

Interference immunity to		IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	10 V/m (1 GHz), 3 V/m (2 GHz), 1 V/m (2.7 GHz)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
surge	IEC/EN 61000-4-5	Level 4 (2 kV L-L)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B

## Dimensions

in **mm** and *inches*

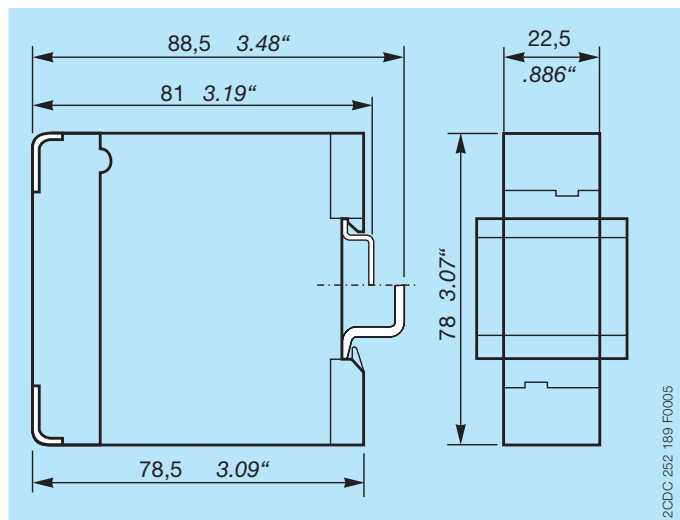

## Further documentation

Document title	Document type	Document number
Electronic relays and controls	Catalog	2CDC 110 004 C02xx

You can find the documentation on the internet at [www.abb.com/lowvoltage](http://www.abb.com/lowvoltage)  
-> Automation, control and protection -> Electronic relays and controls -> Time relays.

## CAD system files

You can find the CAD files for CAD systems at <http://abb-control-products.partcommunity.com>  
-> Low Voltage Products & Systems -> Control Products -> Electronic Relays and Controls.

# Contact us

## **ABB STOTZ-KONTAKT GmbH**

P. O. Box 10 16 80  
69006 Heidelberg, Germany  
Phone: +49 (0) 6221 7 01-0  
Fax: +49 (0) 6221 7 01-13 25  
E-mail: [info.desto@de.abb.com](mailto:info.desto@de.abb.com)

You can find the address of your  
local sales organisation on the  
ABB home page  
<http://www.abb.com/contacts>  
-> Low Voltage Products and Systems

### **Note:**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2017 ABB  
All rights reserved