

TECHNICAL DATA

ABB i-bus® KNX

HCC/S 2.1.1.1

Heating/cooling circuit controller



Device description

The device is a modular installation device (MDRC) in proM design. It is designed for installation in electrical distribution boards and small housings with a 35 mm mounting rail (to EN 60715).

The device is KNX-certified and can be used as a product in a KNX system → EU declaration of conformity.

The device is powered via the bus (ABB i-bus® KNX) and requires no additional auxiliary voltage supply. The connection to the bus is made via a bus connection terminal on the front of the housing. The loads are connected to the outputs using screw terminals → terminal designation on the housing.

The software application Engineering Tool Software (ETS) is used for physical address assignment and parameterization.

Device functions

The following functions for each channel are available for activating heating/cooling circuits:

- Controller channel
- Actuator channel

The two device channels are independent of each other. It is possible to control two different rooms. As an alternative, it is also possible to activate a double pump by combining both channels (channel bundling).

Controller channel

The internal controller is activated in the function as a controller channel. The controller is used to process the data received at the inputs (actual values) or via the bus (ABB i-bus® KNX) (actual values and setpoints). The control values are calculated from the data received and transmitted to the outputs.

Actuator channel

The internal controller is deactivated in the function as an actuator channel. The control values for activating the outputs are calculated by an external controller and received via the bus (ABB i-bus® KNX).

Connections

The devices possess the following connections:

- 10 inputs for sensors
- 2 valve outputs for activating analog and motor-driven valve drives
- 2 pump outputs
- 1 bus connection

The tables below provide an overview of the maximum number of devices that can be connected to the individual product variants.

Valve outputs

| | HCC/S 2.1.X.1 | HCC/S 2.2.X.1 | |
|-------------------------------------|---------------|---------------|--|
| Analog valve drives (0 10 V) | 2 | | |
| Motor-driven valve drives (3-point) | | 2 | |

Pump outputs

| | HCC/S 2.1.X.1 | HCC/S 2.2.X.1 |
|----------------------|---------------|---------------|
| Pumps, 1-phase | 2 | 2 |
| Double pump, 1-phase | 1 | 1 |

Physical inputs

| | HCC/S 2.1.X.1 | HCC/S 2.2.X.1 | |
|-----------------------------|---------------|---------------|--|
| Binary sensors (floating) 6 | | 6 | |
| Temperature sensors | 4 | 4 | |

Inputs

| Function | a | b | С | d | е | f | g | h | i | j |
|---------------------------------------|---|---|---|---|---|---|---|---|---|---|
| Temperature sensor | | | | | | | | | | |
| PT100 | х | х | | | | х | х | | | |
| PT1000 | х | х | | | | х | х | | | |
| KT/KTY | х | х | | | | х | х | | | |
| KT/KTY user-defined | x | х | | | | х | х | | | |
| NTC10k | х | х | | | | х | х | | | |
| NTC20k | х | х | | | | х | х | | | |
| NI-1000 | х | х | | | | х | х | | | |
| Binary sensor (floating) | | | х | х | x | | | х | x | х |
| Pump status (floating contact) | | | х | | | | | х | | |
| Pump fault (floating contact) | | | | х | | | | | x | |
| Pump repair switch (floating contact) | | | | | х | | | | | х |

Outputs


Valve outputs

| Function | A | В | |
|--|---|---|--|
| Analog valve drives | ' | ' | |
| 0 10 V | X | x | |
| 1 10 V | x | x | |
| 2 10 V | x | x | |
| 10 0 V | x | x | |
| Fault detection (overload/short circuit) | x | x | |
| Automatic closing if pump shut down | x | x | |


Pump outputs

| Function | | A | В | |
|-----------------|-------------------------------|---|---|--|
| Individual pump | | ' | | |
| | Automatic operation | х | x | |
| | Direct operation | X | x | |
| | Automatic switch off on fault | х | x | |
| Double pump | | | | |
| | Automatic operation | х | | |
| | Direct operation | х | | |
| | Automatic switch off on fault | х | | |
| | Automatic weekly change | Х | | |
| | Automatic change on fault | x | | |

Dimension drawing

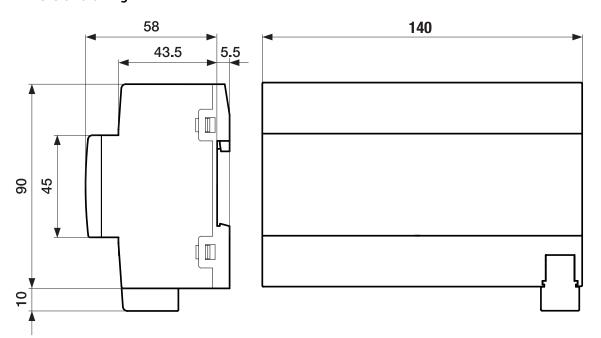

Connection diagram

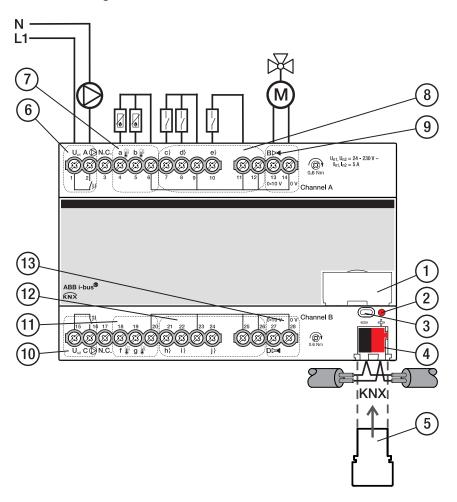

Legend

- 1 Label carriers
- 2 Programming LED
- **3** *Programming* button
- 4 Bus connection terminal
- 5 Cover cap
- 6 Pump output channel A
- 7 Temperature input channel A

- 8 Binary input channel A
- 9 Valve output channel A
- 10 Pump output channel B
- 11 Temperature input channel B
- 12 Binary input channel B
- 13 Valve output channel B

Operating and display elements

| Operating control/LED | Description/function | Display |
|------------------------|------------------------------------|------------------------------------|
| | Assignment of the physical address | LED On: Device in programming mode |
| Programming button/LED | | |

General technical data

| Device | Dimensions | 90 × 140 × 63.5 mm (H x W x D) |
|-------------------------------|--|---|
| | Mounting width in space units | 8 modules, 17.5 mm each |
| | Weight | 0.24 kg |
| | Mounting position | Any |
| | Mounting variant | 35 mm mounting rail |
| | Design | ProM |
| | Degree of protection | IP 20 |
| | Protection class | |
| | Overvoltage category | III |
| | Pollution degree | 2 |
| 1aterials | Housing | Polycarbonate, Makrolon FR6002, halogen free |
| 1aterial note | Fire classification | Flammability V-0 |
| Electronics | Rated voltage, bus | 30 V DC |
| | Voltage range, bus | 21 32 V DC |
| | Current consumption, bus | < 12 mA |
| | Power loss, device | ≤3W |
| | Power loss, bus | ≤ 0.25 W |
| | Power loss, relay output 5 A | ≤ 0.6 W |
| | KNX safety extra low voltage | SELV |
| Connections | Connection type, KNX bus | Plug-in terminal |
| | Cable diameter, KNX bus | 0.6 0.8 mm, solid |
| | Connection type, inputs/outputs | Screw terminal with universal head (PZ 1) |
| | Pitch | 6.35 mm |
| | Tightening torque, screw terminals | 0.5 0.6 Nm |
| | Conductor cross-section, flexible | 1 × (0.2 2.5 mm²) / 2 × (0.2 2.5 mm²) |
| | Conductor cross section, rigid | 1 × (0.2 4 mm²) / 2 × (0.2 4 mm²) |
| | Conductor cross section with wire end ferrule without plastic sleeve | 1 × (0.25 2.5 mm²) |
| | Conductor cross section with wire end ferrule with plastic sleeve | 1 × (0.25 4 mm²) |
| | Conductor cross section with TWIN wire end ferrule | 1 × (0.5 2.5 mm²) |
| | Length, wire end ferrule contact pin | ≥ 10 mm |
| Certificates and declarations | Declaration of conformity CE | → 2CDK508230D2701 |
| Ambient conditions | Operation | -5 +45 °C |
| | Transport | -25 +70 °C |
| | Storage | -25 +55 °C |
| | Humidity | ≤ 95 % |
| | Condensation allowed | No |
| | Atmospheric pressure | ≥ 80 kPa (corresponds to air pressure at 2,000 m above sea level) |

Inputs - contact scanning

| Rated values | Number of inputs | 6 | |
|------------------|--|-----------|--|
| Contact scanning | Scanning current | ≤1 mA | |
| | Scanning voltage | ≤ 12 V DC | |
| Cable length | Between sensor and device input, one-way | ≤ 100 m | |

Inputs - temperature sensor

| Rated values | Number of inputs | 4 | |
|--------------|--|------------------------|--|
| Resistance | Selection | User-defined | |
| | PT 1.000 | 2-conductor technology | |
| | PT100 | 2-conductor technology | |
| | KT | 1k | |
| | KTY | 2k | |
| | NI | 1k | |
| | NTC | 10k, 20k | |
| Cable length | Between sensor and device input, one-way | ≤ 100 m | |

Valve outputs - analog

| Rated values | Number of outputs | 2 |
|--------------|--------------------|--------------|
| | Control signal | 0 10 V DC |
| | Signal type | Analog |
| | Output load | > 10 kohms |
| | Output tolerance | ± 10 % |
| | Current limitation | Up to 1.5 mA |

Pump outputs – relays 5 A

| Rated values | Number of outputs | 2 |
|----------------------|---|--|
| | Rated voltage U _n | 250 V AC |
| | Rated current I _n (per output) | 5 A |
| | Rated frequency | 50/60 Hz |
| | Back-up protection | ≤ 6 A |
| | Relay type | Bi-stable |
| Switching currents | AC-1 operation (cos φ = 0.8) | ≤5A |
| | AC-3 operation ($\cos \varphi = 0.45$) | ≤5A |
| | Switching current at 5 V AC | ≥ 0.02 A |
| | Switching current at 12 V AC | ≥ 0.01 A |
| | Switching current at 24 V AC | ≥ 0.07 A |
| Service life | Mechanical service life | ≥ 10 ⁷ switching operations |
| | AC-1 operation ($\cos \varphi = 0.8$) | ≥ 10 ⁶ switching operations |
| | AC-3 operation (cos φ = 0.45) | ≥ 10 ⁶ switching operations |
| Switching operations | Switching operations per minute when one relay switches | ≤ 500 |

Device type

| Device type | Heating/cooling circuit controller | HCC/S 2.1.1.1 | |
|-------------|------------------------------------|---|--|
| | Application | Heating/Cooling Circuit Controller, 0-10 V, 2f/ | |
| | | = current version number of the application | |
| | Maximum number of group objects | 106 | |
| | Maximum number of group addresses | 255 | |
| | Maximum number of assignments | 255 | |

(i) Note

Observe software information on the website

→ www.abb.com/knx.

Ordering details

| Description | MW | Туре | Order no. | Packaging [pcs.] | Weight (incl. packaging) [kg] |
|------------------------------------|----|---------------|-----------------|---------------------|-------------------------------------|
| Heating/cooling circuit controller | 8 | HCC/S 2.1.1.1 | 2CDG110218R0011 | 1 | 0.28 |



ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82 69123 Heidelberg, Germany Tel.: +49 (0)6221 701 607

Fax: +49 (0)6221 701 724

Email: knx.marketing@de.abb.com

Additional information and regional points of contact:

www.abb.de/knx www.abb.com/knx

