

DATA SHEET

CM574-RCOM

Communication module




1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 170 401 R0201	CM574-RCOM, communication module, 2 serial RS-232/485, RCOM/RCOM+ protocol	Active
 *) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations. 		

Table 1: Spare parts for communication modules with 2 serial interfaces

Part no.	Description	
1SAP 182 000 R0001	TA532: 9-pin terminal block set for communication modules CM574-RS and CM574-RCOM, 10 pieces, spring type terminal	
 The communication modules with 2 serial interfaces are delivered with two 9-pin terminal blocks TA532 (1SAP 182 000 R0001). The terminal block listed in the ordering data is for spare part only if needed. 		

2 Dimensions

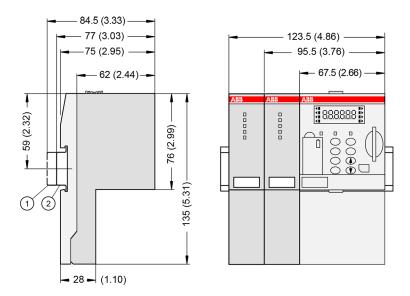

- 1 Din rail 15 mm
- 2 Din rail 7.5 mm

) The dimensions are in mm and in brackets in inch.

3 Technical data

The system data of AC500 and S500 are applicable to the standard version *Chapter 4 "System data AC500" on page 3*.

The system data of AC500-XC are applicable to the XC version.

Only additional details are therefore documented below.

The technical data are also applicable to the XC version.

Parameter	Value
Interface	Serial interface
Transmission rate	2.4 kbit/s to 19.2 kbit/s
Protocol	RCOM/RCOM+
Interface connector	MC 0.5/9-G-2.5, 9-pin, male
Processor	PowerPC
Usable CPUs	PM57x, PM58x, PM59x
Usable terminal bases	All TB5xx
Ambient temperature	see:
	System data AC500 & <i>Chapter 4 "System data</i> AC500" on page 3
	System Data AC500-XC
Communication module bus	Dual-port memory, 8 kB

Parameter	Value
Internal power supply	Through the communication module bus of the terminal base
Current consumption from 24 V DC power supply at the terminal base of the CPU	Typ. 80 mA
Internal RAM memory	256 kB
External RAM memory	-
External flash memory	512 kB (firmware)
State display	PWR, RDY, RUN, STA, ERR
Weight	Ca. 150 g

Table 2: Technical data of the interfaces

Parameter	Value
Serial interface standard	EIA RS-232 or EIA RS-485
Interface connector	Pluggable 9-pin terminal block
Potential separation	Yes, from the CPU, 500 V DC
Serial interface parameters	Protocol interface configurable via PLC configu- ration. Preset configuration for debugging the ter- minal interface.
Modes of operation	Data exchange
Protocols supported	RCOM/RCOM+

The pin assignment of the serial interfaces RCOM and OPERATOR is identical to the serial interface COM1 of the processor modules PM57x, PM58x and PM59x.

4 System data AC500

4.1 Environmental conditions

Table 3: Process and supply voltages

Ра	rameter	Value
24	24 V DC	
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
100	V AC240 V AC wide-range supply	
	Voltage	100 V 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allo	bwed interruptions of power supply, according to	EN 61131-2
	DC supply	Interruption < 10 ms, time between 2 interrup- tions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 inter- ruptions > 1 s

NOTICE! Risk of damaging the PLC due to improper voltage levels! Never exceed the maximum tolerance values for process and supply voltages.

- Never fall below the minimum tolerance values for process and supply voltages. Observe the system data & Chapter 4 "System data AC500" on page 3 and the technical data of the module used.

NOTICE!

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V _
- _ Frenquency below 47 Hz or above 62.4 Hz

NOTICE!

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter	Value
Temperature	
Operating	0 °C +60 °C: Horizontal mounting of modules.
	0 °C +40 °C: Vertical mounting of modules. Output load reduced to 50 % per group.
Storage	-40 °C +70 °C
Transport	-40 °C +70 °C
Humidity	Max. 95 %, without condensation
Air pressure	
Operating	> 800 hPa / < 2000 m
Storage	> 660 hPa / < 3500 m

4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

4.3 Power supply units

AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.

For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.

Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.

Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)

To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.



WARNING!

Improper installation can lead to death by touching hazardous voltages!

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

4.4 Electromagnetic compatibility

Table 4: Electromagnetic compatibility

Parameter	Value	
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications.		
IEC 61131-2, zone B		
Schapter 4.6 "Approvals and certifications" on page 7		
Radiated emission according to	Yes	
IEC 61000-6-4 CISPR11, class A		
Conducted emission according to	Yes	
IEC 61000-6-4 CISPR11, class A		
Electrostatic discharge (ESD) according to	Air discharge: 8 kV	
IEC 61000-4-2, criterion B	Contact discharge: 6 kV	

Parameter	Value
Fast transient interference voltages (burst)	Power supply (DC): 2 kV
according to	Digital inputs/outputs (24 V DC): 1 kV
IEC 61000-4-4, criterion B	Digital inputs/outputs (240 V AC): 2 kV
	Analog inputs/outputs: 1 kV
	Communication lines shielded: 1 kV
High energy transient interference voltages	Power supply (DC):
(surge) according to	- Line to ground: 1 kV
IEC 61000-4-5, criterion B	- Line to line: 0,5 kV
	Digital inputs/outputs/relay:
	(24 V DC):
	- Line to ground: 1 kV
	(AC):
	- Line to ground: 2 kV
	- Line to line: 1 kV
	Analog inputs/outputs:
	- Line to ground: 1 kV
	Communication lines:
	- Line to ground: 1 kV
Influence of radiated disturbances	Test field strength: 10 V/m
IEC 61000-4-3, criterion A	
Influence of line-conducted interferences	Test voltage: 10 V
IEC 61000-4-6, criterion A	
Power frequency magnetic fields	30 A/m 50 Hz
IEC 61000-4-8, criterion A	30 A/m 60 Hz

4.5 Mechanical data

Parameter	Value
Mounting	Horizontal/Vertical
Wiring method	Spring/screw terminals
Degree of protection	PLC system: IP 20
	 with all modules or option boards plugged in with all terminals plugged in with all covers closed
Housing	Classification V-2 according to UL 94
Vibration resistance (sinusoidal) acc. to IEC	All three axes
60068-2-6	2 Hz 8.4 Hz, 3.5 mm peak,
	8.4 Hz 150 Hz, 1 g
Shock test acc. to IEC 60068-2-27	All three axes
	15 g, 11 ms, half-sinusoidal
Mounting of the modules:	

Parameter	Value
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm

4.6 Approvals and certifications

The PLC Automation catalog contains an overview of the available approvals and certifications.

new.abb.com/plc

© Copyright 2017-2024 ABB.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.