
Protection and Connection

Product environmental information Switch-disconnector, OT2000/2500

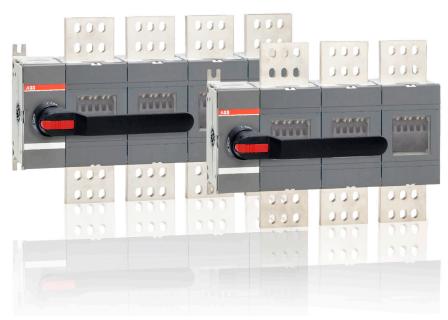

Product Conformity & Compliance

REACh and SVHC (Regulation EC 1907/2006)

With reference to the Regulation (EC) No. 1907/2006 issued by the European Union for the Registration, Authorization and Restriction of Chemicals (REACH), please be aware that:

- During normal and reasonably foreseeable conditions use, OT switch disconnectors manufactured by ABB Oy, Protection and Connection do not internationally release any substance or preparation;
- ABB Oy, Protection and Connection continuously assessment

OT switch disconnectors were classified as Articles and during normal reasonably foreseeable conditions of use, do not internationally release any substance or preparation.

ABB Oy, Protection and Connection continuously undertake communication throughout its supply chain in order to collect information about suppliers' compliance with REACh regulation.

RoHs and RoHs II

OT are not within Directive 2002/95/EC (RoHs) scope. It is still not clear if they will be within the scope of Directive 2011/65/EU (RoHS II), whose provisions, in any case, will be mandatory starting from July 2019.

However, according to our best knowledge, OT switch disconnectors do not contain any of the restricted substances listed into RoHS and RoHS II directives.

SVHC (Regulation EC 1907/2006 REACH)

ABB Oy, Protection and Connection continuously assesses its products for content of Substances of Very High Concern (SVHC), as included in the "Candidate List" by the European Chemicals Agency (ECHA). According to our best knowledge, OT switch disconnectors do not contain SVHC substances exceeding 0.1% w/w.

WEEE

OT switch disconnectors are not included in the scope of Directive 2002/96/EC (1st version), thus they are also excluded from the new Directive version (2012/19/EU), at least up to August 14th 2018.



Product Safety

The product has been tested according to standards:

IEC/EN60947-1 IEC/EN60947-3

Directives:

"Low Voltage Directive" (LDV) 2014/35/EC

"Electromagnetic Compatibility Directive" (EMC) 2014/30/EC


Material declaration

The charts below the constituents of OT2000-2500E_ switches. The constituent materials are distributed as follows.

The total weight of the products is the follows:


OT2000-2500E_ 2 pole switches: 16 kg OT2000-2500E_ 3 pole switches: 22 kg OT2000-2500E_ 4 pole switches: 28 kg

Material	OT2000-2500 - 3 pole switch Weight (kg)	0T2000-2500 - pole Weight (kg)	0T2000-2500 - mechanism Weight (kg)
PE	3,95	3,954	-
PA	2,31	1,518	0,789
Fe	1,83	0,501	0,553
Zn	1,00	0,006	0,949
PC	0,33	0,270	0,061
St Fe	0,13	0,126	-
Al	0,04	-	0,040
Ag	0,02	0,021	-
Rubber	0,001	-	-

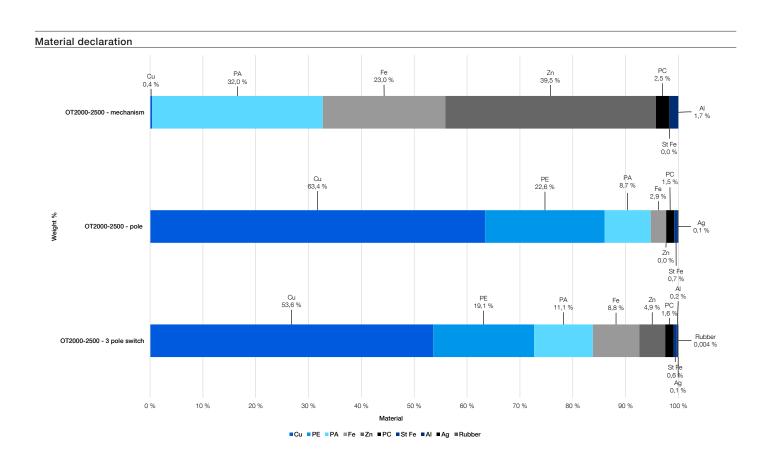

Packaging

The total weight for OT2000-2500E_3 pole model packing material is 1,5 kg. The cardboard are used in the packaging materials, which are recyclable.

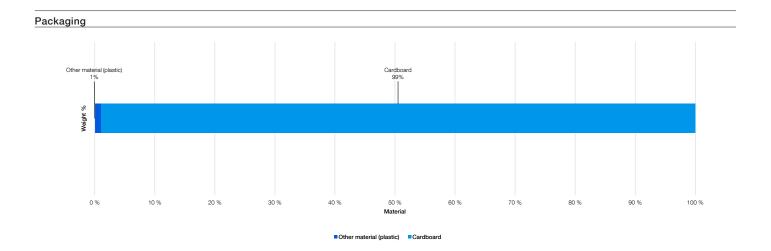

Product use

Energy

Power loss for OT2000E_ is 55 W per pole and for OT2500E_ is 85 W per pole.

Energy consumption during the use of OT2000-2500E_ has been estimated assuming 10 years when operated 3650 hours per year (10 hours per day), load factor 70%.

Energy consumption:

OT2000E_: 4216 kWh OT2500E_: 6515 kWh

ABB Oy Protection and Connection P.O. Box 622 FI-65101 Vaasa, Finland www.abb.com

Find the address of your local sales organization on the ABB homepage:

www.abb.com/contacts
> Low Voltage Products and Systems

