

Slide lock for MKey8 and MKey9

A simple to use gate bolt with a rugged metal construction that allows forces up to 10,000N (1,000kg) on large hinged doors. It is easily installed on hinged or sliding guards using 4xM6 mounting bolts and can be supplied for left-hand or right-hand fitting. Once installed there is no need for extra brackets or door handles, and there are no susceptibility to misalignment damage. Operators are required to manually close the guard, it cannot close accidentally. For further protection padlock holes are provided for locking of the open handle to prevent the guard from being closed and the machine to start during maintenance.

Supplied in yellow and black to aid with hazard identification and supplied with handle and flat actuator.


As a separate accessory for the Slide lock a "Rear handle" can be ordered. This can be used when there is a requirement to move the handle from inside the guard area. As a second separate accessory for the Slide lock a "Spring loaded catch" exist. This is to prevent accidental actuation after opening of the handle.




Ordering information

Туре	Order code
Slide Lock MKey8,9 Left	2TLA050040R0500
Slide Lock MKey8,9 Right	2TLA050040R0501
Slide Lock MKey8,9 Rear handle	2TLA050040R0510
Slide Lock MKey8,9 Spring loaded catch	2TLA050040R0511

Dimensions

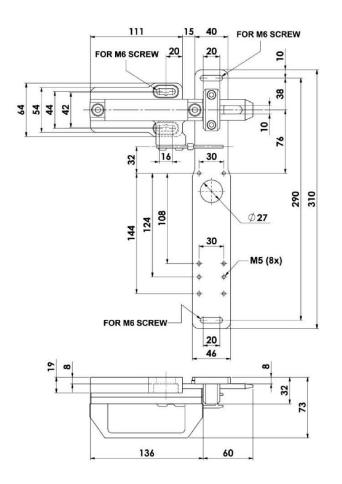



SPRING LOADED CATCH

ABB AB Jokab Safety

Varlabergsvägen 11 SE-434 39 Kungsbacka Tel. +46 (0) 21-32 50 00

www.abb.com/jokabsafety



Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatso-ever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2019 ABB All rights reserved